

The logo for the Janser KONDOR machine, featuring the word 'Janser' in blue above a white silhouette of a condor's head and wings, with the word 'KONDOR' in large blue capital letters below it.

# KONDOR



## Manage all challenges Grinding machine KONDOR

Very powerful, robust floor grinding machine for small to medium-sized areas. Suitable for all tasks of subfloor treatment.

further information please find page 10



Professional Flooring Technology



## CONTENTS

| Chapter                                                 | Page         | Products                                                                                                                    |
|---------------------------------------------------------|--------------|-----------------------------------------------------------------------------------------------------------------------------|
| <b>SANDING MACHINES AND ACCESSORIES</b>                 | <b>3-9</b>   | Columbus, Trivo-Disc, Speedtronic, Colibri II, Kondor, BS 270, BS 330, HF 125HF, 150 P HF 180 Caddy                         |
| <b>DUST EXTRACTION</b>                                  | <b>10</b>    | Janvac 1600-H Power, Janvac 2400-H Power                                                                                    |
| <b>FLOOR COVERING REMOVAL</b>                           | <b>11-15</b> | Power Stripper, Compact Stripper 18 V, PM 1600, Cosmo IV Stripper, Master Mobil II, Strato Mobil IV, Junior Ride-on, Blades |
| <b>SPECIAL TOOLS AND ACCESSORIES</b>                    | <b>16</b>    | Hand Grinder, Scraper, Pulling Claw, Grinding Stones                                                                        |
| <b>TROWELS AND SPREADERS</b>                            | <b>17</b>    | Levelling Spreader, Pin Leveller, Screed Trowel, Notch Profiles                                                             |
| <b>STIRRING TOOLS</b>                                   | <b>18</b>    | Stirring Stations, Stirring Machines                                                                                        |
| <b>TOOLS FOR LAYING SCREED</b>                          | <b>19</b>    | Aeration Roller, Spiked Soles, Pre coating Roller, Copper Tape, AquaFox, Cleaning Bucket Porcupine                          |
| <b>SUBFLOOR PREPARATION<sup>1</sup></b>                 | <b>20</b>    | Moisture Meter, Moisture Indicator                                                                                          |
| <b>WORK ON ELASTIC FLOOR COVERINGS</b>                  | <b>21-24</b> | Grooving Machines, Welding Guns, Hot Air Blower, Automatic welder, Grooving Tools, Trimming Knives, PVC Cold Welding        |
| <b>CUTTING OF ELASTIC &amp; TEXTILE FLOOR COVERINGS</b> | <b>25-26</b> | Safety Knives and Blades, Corner Template, Strip- and Edge Cutter, Rulers, Scriber, Shears                                  |
| <b>STRETCHING AND PRESS-ON TOOLS</b>                    | <b>27</b>    | Knee Kicker, Power Stretcher, Pressure Roller, Hammer                                                                       |
| <b>INSTALLATION AIDS FOR PVC DESIGN FLOORING</b>        | <b>28</b>    | Pressure Roller, Design-Cutter                                                                                              |
| <b>MEASURING TOOLS</b>                                  | <b>28</b>    | Distance Meter                                                                                                              |
| <b>CUTTING GUILLOTINES</b>                              | <b>29</b>    | STRATCUT, LX-340 , Magnum, Bullet Shears                                                                                    |
| <b>PARQUET SANDING MACHINES AND ACCESSORIES</b>         | <b>30-32</b> | Belt Sander TIGER , Stair and Edge Sander PANDA                                                                             |
| <b>INSTALLATION AIDS</b>                                | <b>33</b>    | Shunting Devices, Melting Putty, Templates, Multi-Master                                                                    |
| <b>KNEE PROTECTION</b>                                  | <b>34</b>    | FENTO Knee Pads Insertable Knee Pads, GEL-Knee Pads, Super Soft Knee Pads, Medical Knee Pads, FENTO Board                   |
| <b>MARKING TOOLS</b>                                    | <b>36</b>    | TRACER Marker and Accessories                                                                                               |

## SANDING MACHINES AND ACCESSORIES

### Grinding machine KONDOR

Very powerful, robust floor grinding machine for small to medium-sized areas. Suitable for all tasks of subfloor preparation.

The KONDOR is designed to manage all daily outside challenges. No matter if it is about basic grinding of screed or other surfaces or most aggressive use of PCD tools to remove adhesive floor covering residues of layers of self-levelling compounds.

The KONDOR is characterized by ergonomic handling, a very effective grinding performance and TOP -performance ratio, even with the grinding discs.

#### Application

Removal of floor covering residues  
Removal of adhesives and coatings  
Grinding and removal of screed, concrete and asphalt  
Leveling of uneven surfaces

#### Technical Specification

|                    |                |
|--------------------|----------------|
| Power supply:      | 230V/50Hz      |
| Motor power:       | 2,2kW          |
| Dimensions LxWxH:: | 720x560x1170mm |
| Working width:     | 300mm          |
| Speed:             | 1.450 rpm      |
| Hose connection:   | 50/76mm        |
| Weight:            | 71kg           |

Comes complete with connection cable 10m 3x2.5mm²,  
tool locking bolt and accessory bag  
Order no. 112 944 000



#### Grinding Disc

Grinding ring PCD  
Order no. 112 944 610



Grinding ring PCD duo  
Order no. 112 944 640



Grinding ring PCD Split Gold  
Order no. 112 944 650



Grinding ring blue  
Hard bond for soft to medium-hard surfaces,  
e.g. screeds HB grit 30/40  
Order no. 112 944 620



Grinding ring green  
Medium bond for medium to hard surfaces,  
e.g. concrete HB grit 30/40  
Order no. 112 944 630



Transport position with a height  
of just 480mm

Newly developed tool  
holder system



With footrest for easy tipping  
of the machine



## SANDING MACHINES AND ACCESSORIES

### Columbus

The Columbus simply and effectively removes all unwanted subfloor materials. This machine will mill, grind and sand your floor surface while creating a minimum of dust, helping to maintain a healthier working environment.

The strong design and well-built construction of the Columbus ensures long machine life and good reliability.

By raising and lowering the lever, the machine glides across the surface in semicircles. All types of plaster, screed, asphalt and adhesive along with small surface irregularities can be removed from the subfloor with ease.

The wide range of sanding plates make the Columbus suitable for all types of floor surfaces. The machine is unsurpassed in saving time and effort, with sanding plates, discs and brushes changeable in seconds.

The 3-gear planetary transmission is designed to cope with the toughest tasks.

#### Technical Specification

|               |                    |
|---------------|--------------------|
| Power supply  | 230V or 120 V      |
| Motor power   |                    |
| Mod. 135 SH   | 1200 Watt (1,5 HP) |
| Mod 145 SH    | 1500 Watt (2.0 hp) |
| Working width | Ø 375 mm (14 ¾")   |
| Speed         | 140 rpm            |
| Weight        | 42 kg (93 lbs)     |

Columbus Model 145 SH 1500 Watts ,  
230 V 112 560 000

120 V 112 560 600

Columbus Model 135 SH 1200 Watts ,  
230 V 112 455 000

120 V 112 455 600

### Pad mounting plate

for mounting pads  
Ø 406 mm (16") 783 000 042

### Pads

|           |                                                |
|-----------|------------------------------------------------|
| Pad BLACK | for removing stubborn dirt                     |
| Pad BROWN | for removing stubborn dirt                     |
| Pad GREEN | for basic and routine cleaning                 |
| Pad BLUE  | for cleaning                                   |
| Pad RED   | for routine cleaning                           |
| Pad BEIGE | for oiling                                     |
| Pad WHITE | for polishing of lino or PVC floors and oiling |

#### Normal pads Ø 410 (16") (thin)

|       |             |
|-------|-------------|
| black | 783 000 015 |
| green | 783 000 016 |
| beige | 783 000 019 |
| white | 783 000 018 |

#### Polyester pads Ø 410 (16") (thick)

|       |             |
|-------|-------------|
| black | 783 000 360 |
| brown | 783 000 370 |
| blue  | 783 000 380 |
| red   | 783 000 390 |
| white | 783 000 400 |



### Optional Accessories

#### Dust Extraction Ring MULTI-VAC III

Fits on Columbus models 135, 145, 155  
fix installation  
Contents: dust ring with closure-ring,  
Kevlar sealing sleeve, 2 suction hoses  
and Y-adapter

Order no. 113 722 000



## SANDING MACHINES AND ACCESSORIES

### Grinding Plate with Felt

For holding sandpaper discs, also suitable for compressing adhesive on PVC/Linoleum type floor coverings.  
distance ring included

Ø 375 (14 3/4") 112 300 600



### Sandpaper double-sided

Pack of 10 pcs

|                                     |             |
|-------------------------------------|-------------|
| Ø 375 (14 3/4") for Mod.135/145/155 |             |
| Grit 12                             | 112 309 000 |
| Grit 16                             | 112 311 000 |
| Grit 24                             | 112 312 000 |
| Grit 30                             | 112 313 000 |
| Grit 40                             | 112 314 000 |
| Grit 60                             | 112 315 000 |
| Grit 80                             | 112 316 000 |
| Grit 100                            | 112 317 000 |
| Grit 120                            | 112 318 000 |



### Grinding Plate with Rubber Surface

for holding sandpaper

Ø 375 (14 3/4") 112 306 000



### Sandpaper double-sided

synthetic resin, red  
Pack of 10 pcs

|                                     |             |
|-------------------------------------|-------------|
| Ø 375 (14 3/4") for Mod.135/145/155 |             |
| Grit 12                             | 112 324 000 |
| Grit 16                             | 112 310 000 |
| Grit 24                             | 112 325 000 |
| Grit 30                             | 112 326 000 |
| Grit 40                             | 112 327 000 |
| Grit 60                             | 112 328 000 |



### Hexa Plate

with 6 diamond segments  
For grinding hard surfaces such as concrete or levelling compounds.  
Larger area coverage makes this plate more effective than other diamond plates, especially when grinding plaster and anhydrite screed.

Ø 375 (14 3/4") 112 353 500



### Grinding Gauze

Pack of 10 pcs

|                                     |             |
|-------------------------------------|-------------|
| Ø 410 (16 1/8") for Mod.135/145/155 |             |
| Grit 60                             | 783 000 045 |
| Grit 80                             | 783 000 047 |
| Grit 100                            | 783 000 050 |
| Grit 120                            | 783 000 055 |
| Grit 150                            | 783 000 057 |
| Grit 180                            | 783 000 060 |
| Grit 220                            | 783 000 062 |
| Grit 320                            | 783 000 064 |



### Columbus DIA-DISC Grinding Plate

with PCD inserts

Grinding of screed, removing sinter surfaces (anhydrite), adhesive residues, levelling compounds, thin coatings and painted surfaces.

complete with 5 PCD split Segments  
Order no. 112 381 300

PCD split diamond segment GOLD  
Order no. 112 382 100



### Abrasive Disc

Thin disc with scattered hard metal fragments welded to the surface. For roughening the surface of anhydrite and screed. Also suitable for levelling surface irregularities.

|                 |             |
|-----------------|-------------|
| Ø 375 (14 3/4") |             |
| Grit 14         | 112 308 000 |
| Grit 24         | 112 308 024 |
| Grit 36         | 112 308 036 |

|                                       |             |
|---------------------------------------|-------------|
| Ø 400 (15 3/4") non columbus machines |             |
| Grit 14                               | 112 520 000 |
| Grit 24                               | 112 520 024 |
| Grit 36                               | 112 520 036 |

|                 |             |
|-----------------|-------------|
| Ø 430 (16 7/8") |             |
| Grit 14         | 112 815 000 |



## SANDING MACHINES AND ACCESSORIES

# TRIVODISC II

Developing the Trivo-Disc we have consulted the best experts: our customers. Because this first class three disc sanding plate not only makes parquet flooring shine but also fulfils the highest expectations of parquet and floor layers. The Trivo-Disc is quiet running with powerful dust extraction. Self-propelled and quickly mounted onto the Columbus models 145 SH (1500W), 155 and Speedtronic.

### Special features

- Thanks to the self-propelled Velcro sanding discs the removal rate is very effective.
- The results are effectively efficient.
- Perforated Velcro sanding discs and perforated abrasives allow collection of sanding dust and optimal heat dissipation.
- Large plate apertures allow optimal suction capacity.
- Self-propelled sanding discs with low-noise toothed belt technology.
- The speed of the Velcro sanding discs can be adjusted according to surface and task (Speedtronic).
- Included in the delivery: Kevlar sealing sleeve for Multi-Vac.

### The result

One revolution of the disc equals 4 revolutions of the sanding plates. The result: 600 rpm – the ideal speed for the perfect finishing touch.


### Technical Specification

|                 |                   |                                    |
|-----------------|-------------------|------------------------------------|
| 3 support discs | Ø 150 mm (5 7/8") | comes complete with sealing sleeve |
| Working width   | 400 mm (15 3/4")  | for Columbus 112 882 000           |
| Weight          | 7 kg (15,43 lbs)  | for Numatic 112 883 000            |

### Optional Accessories

TRIVO-DISC Case Set  
complete with 1 pc TRIVO DISC  
25 pcs Velcro sanding disc, ceramic, grit 36  
50 pcs Velcro sanding disc, ceramic, grit 60  
50 pcs Velcro sanding disc OXISand, grit 60  
50 pcs Velcro sanding disc OXISand, grit 80  
50 pcs Velcro sanding disc OXISand grit 100  
3 pcs FIBERPAD Ø 150  
3 pcs soft velcro pad Ø150 mm (5 7/8"), 5mm (3/16")

for Columbus Mod.145 SH, 155 S  
and Speedtronic 112 882 900  
for Numatic 112 883 900

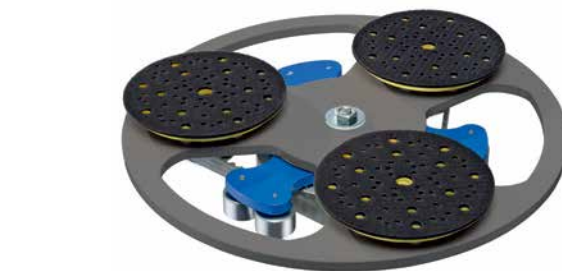

Application on Columbus  
Ideal torque.  
Easy handling.  
Quiet operation.  
Excellent performance ratio.



Application on Speedtronic  
Enormous sanding capacity with variable speed control between 80 – 400 rpm. Efficient working thanks to optimal sanding pressure. Guided on casters guaranteeing fatigue-free working.

|                      |             |
|----------------------|-------------|
| Soft velcro pad      |             |
| Ø 150 (5 7/8") black |             |
| 5 mm (3/16")         | 448 000 054 |
| 10 mm (3/8")         | 448 000 053 |



TRIVO-DISC II case without accessories  
Order no. 112 882 800



Velcro sanding discs  
Ø 150 (5 7/8")  
punched high-class corundum



|          | (Packing unit) |             |
|----------|----------------|-------------|
| Grit 40  | (50)           | 444 806 040 |
| Grit 60  | (50)           | 444 806 060 |
| Grit 80  | (50)           | 444 806 080 |
| Grit 100 | (100)          | 444 806 100 |
| Grit 120 | (100)          | 444 806 120 |

Velcro sanding discs  
Ø 150 (5 7/8")  
OXI Sand



|          | (Packing unit) |             |
|----------|----------------|-------------|
| Grit 40  | (50)           | 448 107 040 |
| Grit 60  | (50)           | 448 107 060 |
| Grit 80  | (100)          | 448 107 080 |
| Grit 100 | (100)          | 448 107 100 |
| Grit 120 | (100)          | 448 107 120 |

Velcro sanding discs  
Ø 150 (5 7/8")  
CERAMIC



|         | (Packing unit) |             |
|---------|----------------|-------------|
| Grit 36 | (25)           | 444 813 036 |
| Grit 60 | (50)           | 444 813 060 |

Velcro sanding discs  
Ø 150 (5 7/8")  
perforated zirconium



|          | (Packing unit) |             |
|----------|----------------|-------------|
| Grit 40  | (25)           | 444 809 040 |
| Grit 60  | (25)           | 444 809 060 |
| Grit 80  | (25)           | 444 809 080 |
| Grit 100 | (25)           | 444 809 100 |

## Parquet Edge Sander RS 150

The RS 150 equipped with a very powerful motor, convinces high removal rates and enormous maneuverability in the field of edge grinding of parquet.

The freely rotatable extraction hood allows the best possible suction and ingenious freedom of movement when grinding edges.

### Product advantages:

- Powerful, high-torque motor
- High removal rate
- Freely rotatable suction hood for perfect mobility
- Integrated extraction for virtually dust-free work
- Small, handy

### Technical Specification

|                  |                |                                                                                            |
|------------------|----------------|--------------------------------------------------------------------------------------------|
| Motor power :    | 1400 W         | comes complete with soft velcro pad Ø 150 (5 7/8") black 5 mm (3/16") and suction hose 2 m |
| Sanding discs:   | Ø 150 mm       | Order no. 452 500 000                                                                      |
| Speed, variable: | 600 - 2100 rpm |                                                                                            |
| Weight: approx.  | 4 kg           |                                                                                            |



### Accessories

Spare Soft velcro pad Ø 150 (5 7/8") black 5 mm (3/16")  
Order no. 448 000 054

### Diamond sanding plates

|                               |             |
|-------------------------------|-------------|
| Blue grit 30/40               | 464 600 100 |
| Order no.                     |             |
| Orange grit 30/40 spread open | 464 600 150 |
| Order no.                     |             |
| Green grit 50                 | 464 600 200 |
| Order no.                     |             |



## SANDING MACHINES AND ACCESSORIES

**Structured, natural parquet surfaces are enjoying great popularity!  
...we show you how it works.**

**Fine sanding with structural effect**  
...transforms every parquet flooring into a lively surface..

The unique FIBREPAD has been developed for fine sanding of parquet flooring and for deep cleaning of surfaces like wood, stone and metal.

Its extremely long life span means that the pad doesn't need to be changed in the middle of the work process. The advantage is an even polishing result.

The FIBREPAD achieves through its shape and fibre structure a very high sanding performance, excellent dust extraction and finally a spotless and scratch-free surface, ready to be oiled or varnished.

The most important features at a glance:

- no scratches when sanding
- steady sanding performance – uniform polishing results
- high surface quality
- sands faster than conventional abrasives
- extremely long life span

(not suitable for intermediate varnish sanding)

**The advantage for your customers:**  
the treated surface has a higher quality and is less delicate

### FIBREPAD Ø 150 for TRIVO-DISC

with velcro backing

Excellent results can be achieved with the Velcro backed FIBREPAD Ø150 together with the TRIVO-DISC and Columbus machine.

The FIBREPAD Ø150 is also perfectly suited for edge sanding and can be mounted onto most edge sanders.

Three pads are required for fitting on the TRIVO-DISC.

Order no. 488 811 000



### Disc brush SIC Ø 160 mm for TRIVO-DISC

with velcro backing

The prepared parquet surface can be additionally processed with the abrasive disc brushes before the final treatment.

For different degrees of structures in the floor surface, the brushes are available in different grits.

Fits on Columbus 145 SH + 155 S (not for Speedtronic)

For the assembly on the TRIVO-DISC three brushes are necessary.

|                    |             |
|--------------------|-------------|
| Disc brush Grit 46 | 462 300 046 |
| Disc brush Grit 60 | 462 300 060 |
| Disc brush Grit 80 | 462 300 080 |

Disc brushes kit comes in Systainer

T-Loc Combi III complete with:

3 x Disc brush SIC K46

3 x Disc brush SIC K60

3 x Disc brush V2A stainless steel

3 x Fiberpad with Velcro

1 x Grip gloves with nubs

Order no. 462 300 000



### Diamond Sanding Disc for TRIVO-DISC

The high-performance tool for the TRIVO-DISC Plate

For effective sanding of very hard varnishes or coatings for example on wood flooring, such as 2-K Lacquer, DD- Lacquer UV or LED Coatings, Aluminum Oxides

3 pcs of the Diamond Sanding Discs are needed for a TRIVO-DISC

Diamond Sanding Disc  
Grit 30/40 blue 464 500 100

Replacement Diamond Ring incl. intermediate Pad  
Grit 30/40 blue 464 500 110



## SANDING MACHINES AND ACCESSORIES

### SPEEDTRONIC

Great sanding power with adjustable speed control from 80 to 400 rpm.

Work efficiently with ideal sanding pressure, removing adhesives, sanding levelling compounds and concretes. Also for sanding parquet floors. With the included additional weights, sanding pressure can be varied according to each surface.

The machine is also designed for parquet requirements and can be perfectly used for intermediate sanding and fine sanding. Infinitely adjustable speed gives quick sanding results, making the machine very efficient.

The machine can also be effectively used for cleaning and maintenance. The SPEEDTRONIC 2200 can also be quickly dismantled for easy transport.

#### Technical Specification

|                            |                    |
|----------------------------|--------------------|
| Power Supply               | 230V               |
| Motor Power                | 2200 Watt (3hp)    |
| Working width approx.      | Ø 375 mm (14 3/4") |
| Speed                      | 80-400 rpm         |
| Weight                     |                    |
| with additional weights    | 65 kg (143lbs)     |
| without additional weights | 51 kg (112lbs)     |

Includes additional weights.  
Sanding discs not included.

Order no. [112 770 000](#)

#### Accessories

##### QUICK-CHANGE Base Plate

For mounting of QUICK-CHANGE diamond or PCD grinding segments. (Segments are not included)

Order no. [112 380 000](#)

For each plate 5 pieces are required.

##### QUICK-CHANGE diamond segments ECO:

For high requirements with top -performance ratio

##### BLUE

For sanding soft to medium-sized surfaces, e.g. cement screeds, abrasive screeds

|              |                             |
|--------------|-----------------------------|
| Grit 18 / 20 | <a href="#">112 382 400</a> |
| Grit 30 / 40 | <a href="#">112 382 430</a> |

##### GREEN

As a universal tool for grinding medium to hard surfaces, e.g. concrete, screed, sintered layers

|              |                             |
|--------------|-----------------------------|
| Grit 18 / 20 | <a href="#">112 382 200</a> |
| Grit 30 / 40 | <a href="#">112 382 230</a> |

##### PCD SPLIT Diamond Segment

For sanding / removing sintered layers (hard), lacquer layers, adhesive residues, etc. Grinding of self levelling compounds and screeds (unevenness)

Order no. [112 382 100](#)

##### PCD Piranha with 5 PCD teeth

Ideal for removing residues of coverings, e.g. second textile backing, felt cardboard, layers of paint and adhesive, ox blood, and much more.

|                     |                             |
|---------------------|-----------------------------|
| left hand rotation  | <a href="#">112 382 370</a> |
| right hand rotation | <a href="#">112 382 380</a> |

##### PCD-Segment

For removing layers of paint and adhesive, leveling compounds, residues of flooring, etc. For horizontal milling of screeds. Removal of unevenness.

|                     |                             |
|---------------------|-----------------------------|
| 2 pcds with bar     |                             |
| left hand rotation  | <a href="#">112 382 360</a> |
| right hand rotation | <a href="#">112 382 350</a> |

##### HD, 1-pcd

|                     |                             |
|---------------------|-----------------------------|
| left hand rotation  | <a href="#">112 382 300</a> |
| right hand rotation | <a href="#">112 382 310</a> |



##### QUICK-CHANGE PCD Segments Premium

Very rugged and strong diamond tool for restoration work. Highly effective grinding capacity without clogging up.

##### Main uses:

removing stubborn adhesives, spackling compound, coatings and residues, sanding screed and concrete as well as leveling floors.

##### QUICK-CHANGE PCD Segment

single-row with carbide web

Order no. [112 380 010](#)

##### QUICK-CHANGE PCD Segment DUO

Heavy duty tool with special PCD base and extra PCD-Split stability bar

Order no. [112 380 060](#)

##### QUICK-CHANGE PCD head segment

Extremely powerful diamond grinding tool for versatile use on subfloors and surfaces

##### Main uses:

sanding screed surfaces and concrete, removing sinter surfaces (i.e. anhydrite), coatings and painted surfaces.

Order no. [112 380 020](#)

##### QUICK-CHANGE PCD trapezoid segment

The innovative shape ensures smoother grinding at high removal rate.

##### Main uses:

sanding screed surfaces and concrete, removing sinter surfaces (i.e. anhydrite), coatings and painted surfaces.

Order no. [112 380 070](#)

##### Hammer

Ø 30 mm (1 3/16") - recoilless

For careful replacement of the QUICK-CHANGE segments.

Order no. [262 469 030](#)



## SANDING MACHINES AND ACCESSORIES

### Colibri Floor grinding machine

high-performance floor grinding machine,  
easy to operate, with only 35kg machine weight!

#### Special Features

- light machine, only 35kg
- high performance of 2600 rpm
- high torque of 43 Nm
- easy tool change
- foldable
- competitively d
- high surface performance

#### Technical Specification

|                      |          |
|----------------------|----------|
| Mains supply         | 230 V    |
| Engine performance   | 2200 W   |
| Working width        | 300 mm   |
| Speed                | 2600 rpm |
| Weight               | 35 kg    |
| Extractor connection | 50/76 mm |

Grinding discs not included

Order no. [112 979 700](#)



double-folding handle for easy  
transport  
10 m special cable for large  
working radius  
dust guard for dust



free operation  
  
change of grinding discs  
with quick release closure,



no risk of losing spanners  
  
water level for setting of grinding  
disc, ensuring even grinding  
performance on any surface



#### Accessories

Grinding discs LW Premium quality  
New, improved grinding discs for Colibri machines  
Reduces noise emissions during grinding by up to 15 dB(A)

PCD disc Piranha pink LW  
with strong grinding performance  
for tough adhesives,  
coatings or carpet residue

Order no. [112 979 810](#)



Universal disc green LW  
with very high and even grinding  
performance for cement subfloor  
and anhydrite floors

Order no. [112 979 820](#)



Universal disc blue LW  
with soft diamond binding  
for hard surfaces, mono concrete,  
hard floor etc.

Order no. [112 979 830](#)



PCD disc Baracuda LW  
with support segments for coarsest  
applications, e.g. tile adhesive,  
very thick coatings, glue, paint etc.

Order no. [112 979 840](#)



#### Additional weight 10 kg

for increased pressure  
and additional grinding  
performance

Order no. [112 979 900](#)



Kevlar sealing sleeve  
LxH 1220x75mm

Order no. [112 979 060](#)



## DUST EXTRACTION

### JANVAC 1600-H Power Dust Extractor

Dust extractors are well suited for extracting sanding dust, cleaning building sites and vacuuming tools such as grinding machines and hand grinders.

#### Advantages of all JANVAC models:

- self-cleaning Teflon-coated tube filter
- main filter BIA Dust category M
- micro filter BIA Dust category H14
- continuous high suction
- filter cleans itself during operation
- low noise level
- additional socket for machines with tracking and automatic power on
- trolley frame with large wheels

#### IMPROVED features

- new 5 m elastic hose
- new 1450W motor with improved vacuum (3100 mm H<sub>2</sub>O)
- Purging ring and adapter ring modified for better airflow
- reinforced HEPA filter attachment
- new bayonet coupling
- practical bag holder
- new synthetic collection bag
- Plug for boiler sealing



#### Technical Specification

|                                            |                              |
|--------------------------------------------|------------------------------|
| Power supply                               | 230 V                        |
| Motor power                                | 1.450 W (1.5 hp)             |
| Motor pcs                                  | 1 x 1.450 W (1.5 hp)         |
| Airflow max.                               | 194 m³ (6851 ft³)            |
| Hose -Ø (inside)                           | 38 mm (1 3/8")               |
| Hose length                                | 5,0 m (13')                  |
| Drum capacity                              | 16 L                         |
| Bag capacity                               | 14 L                         |
| Filter category micro filterH according to | EN 60335-2-69*               |
| Filter surface                             |                              |
| main filter                                | 8.000 cm² (8.61 ft²)         |
| Filter type                                | teflon coated channel filter |
| Filtration efficiency micro filter         | 99,995%*                     |
| Height                                     | 795 mm (2' 7 9/32")          |
| Floor space                                | 450 x 430 mm (1' 5" x 1' 5") |
| Weight                                     | 15 kg (33 lbs)               |

#### Standard Accessories

|                                         |             |
|-----------------------------------------|-------------|
| 5 m grey suction hose Ø 38 mm (1 3/8")  |             |
| rolling floor nozzle 45 cm (1 3/4")     |             |
| suction pipe, suction nozzle for joints |             |
| Order no.                               | 115 095 200 |

#### Spare Accessories Janvac 1600-H Power

|                          |             |
|--------------------------|-------------|
| Collection bag synthetic |             |
| Order no.                | 115 095 260 |

|                                                                             |             |
|-----------------------------------------------------------------------------|-------------|
| Spare Suction hose Ø 38 mm complete with connecting pieces grey 5 m (16'5") |             |
| Order no.                                                                   | 115 095 280 |

|                                                                               |             |
|-------------------------------------------------------------------------------|-------------|
| 35 L Container with chassis for immediate use without additional retrofitting |             |
| Order no.                                                                     | 115 095 201 |

|                                                                       |             |
|-----------------------------------------------------------------------|-------------|
| PU Suction hose Ø 38, L 5 m complete with connection piece and clutch |             |
| Order no.                                                             | 115 095 285 |

#### Spare Accessories Janvac 1600/2400

|                                                     |             |
|-----------------------------------------------------|-------------|
| Floor suction nozzle - 45 cm (1' 5 3/4") with brush |             |
| Order no.                                           | 115 030 005 |

|                           |             |
|---------------------------|-------------|
| Spare brush inserts, pair |             |
| Order no.                 | 115 030 505 |

|                                                           |             |
|-----------------------------------------------------------|-------------|
| Floor suction nozzle - 45 cm (1' 5 3/4") with rubber lips |             |
| Order no.                                                 | 115 030 003 |

|                         |             |
|-------------------------|-------------|
| Spare rubber lips, pair |             |
| Order no.               | 115 030 015 |

|                                   |             |
|-----------------------------------|-------------|
| Groove nozzle cone 40 mm (1 1/2") |             |
| Order no.                         | 785 000 021 |

|                |             |
|----------------|-------------|
| Channel filter |             |
| Order no.      | 115 095 008 |

|             |             |
|-------------|-------------|
| HEPA filter |             |
| Order no.   | 115 095 404 |

### JANVAC 2400-H Power Dust Extractor

Powerful dust extractor with large channel filter  
Longopack Version with integrated flap valve

Useful for trade and industry to extract health-jeopardizing dust.

- Protection frame for easy transport
- Underframe with large wheels

#### Technical Specification

|                                            |                                  |
|--------------------------------------------|----------------------------------|
| Power supply                               | 230 V                            |
| Motor power                                | 1.450 W (1.5 hp)                 |
| Motor pcs                                  | 1 x 1.450 W (1.5 hp)             |
| Airflow max.                               | 194 m³ (6851 ft³)                |
| Hose -Ø (inside)                           | 38 mm (1 3/8")                   |
| Hose length                                | 5,0 m (13')                      |
| Drum capacity                              | 28 L                             |
| Bag capacity                               | Longopack 4x22m                  |
| Filter category micro filterH according to | EN 60335-2-69*                   |
| Filter surface main filter                 | 14.000 cm² (15.07 ft²)           |
| Filter type                                | teflon coated channel filter     |
| Filtration efficiency micro filter         | 99,995%*                         |
| Height                                     | 1.300 mm (51 3/16")              |
| Floor space                                | 590 x 555 mm (23 1/4" x 21 7/8") |
| Weight                                     | 31 kg (68 lbs)                   |

#### Standard Accessories

|                                                   |             |
|---------------------------------------------------|-------------|
| suction hose Ø 38 mm - 5 m (1 3/8" - 16' 5") 13', |             |
| rolling floor nozzle 45 cm (1' 5 3/4"),           |             |
| suction pipe, nozzle for joints                   |             |
| Order no.                                         | 115 096 800 |

#### Replacement Parts

|                                    |             |
|------------------------------------|-------------|
| Longopack® box with 4 x 22 m (72') |             |
| Order no.                          | 115 097 720 |



## DUST EXTRACTION

### JANVAC 3600-H Dust Extractor

for connection to powerful grinding or milling machines.  
The 3 motors of 1100 W each can be switched on individually to reduce the suction power if necessary.

#### Features:

- Teflon-coated channel filter and HEPA filter.
- Continuous filter cleaning during operation.
- Robust chassis with smooth-running wheels.
- Low sound pressure level, noise development < 70db(A).
- Smooth-running wheels
- Electrostatic dissipation
- High performance floor nozzle
- External filter cleaning with pressure compensation valve
- Long cable – large operating radius
- Floor emptying

#### Technical Specification

|              |                     |
|--------------|---------------------|
| Input power: | 3300 W              |
| Motors:      | 3 x 1100 W          |
| Air volume:  | max 270 m³/h        |
| Hose Ø x L:  | 50 mm x 5 m         |
| Tank volume: | 35 l                |
| H x W x D:   | 1120 x 770 x 670 mm |
| Weight:      | 41 kg               |



comes complete with suction hose Ø 50 mm, L 5 m  
(without floor suction nozzle and suction pipe)  
Please order required accessories separately

Order no. [115 097 800](#)

#### Accessories

Curved suction tube d 50 mm

Order no. [115 097 351](#)



Floor nozzle with brush and rollers

Order no. [115 097 006](#)



alternatively connection Ø 35:

Suction tube compl. 38mm

Order no. [115 095 102](#)



Tube suction nozzle 450mm

Order no. [115 030 003](#)



End piece conically soft (for Ø 38 )

Order no. [113 720 062](#)



#### Optional accessories

Front nozzle complete with holder and bow

Order no. [115 097 810](#)



Plastic bag 100x60 cm - 30 l, 25 pieces

Order no. [115 097 500](#)



## FLOOR COVERING REMOVAL

### Power-Stripper

Designed for continuous heavy use - Verion 4

#### Features

- original Flex 2000-watt motor (3 hp)
- large bearings for long life cycle
- adjustable handgrips to suit any height
- optional T-handle available
- mechanical components completely enclosed, eliminating penetration of adhesive into blade assembly and bearings
- padded cushion at top of handle to increase pressure with bodyweight

#### Improved features

- Infinitely height-adjustable guiding handle with vibration absorber
- New blade deflector for improved material deflection
- optional: Including height-adjustable wheel-set

#### Technical Specification

|                |                    |
|----------------|--------------------|
| Power supply:  | 230 V or 120 V     |
| Motor power :  | 2000 Watt (3HP)    |
| Working width: | 210 mm (8¼")       |
| Weight :       | 14.4 kg (31,8 lbs) |

#### Standard version

|                                  |             |
|----------------------------------|-------------|
| Guiding handle with pressure pad |             |
| Order no.                        | 111 089 000 |

#### Special version:

|                                          |             |
|------------------------------------------|-------------|
| Guiding handle with T-handle and chassis |             |
| Order no.                                | 111 089 750 |

#### Spare parts / accessories

|                                 |             |
|---------------------------------|-------------|
| Blade 210x60x1 mm (8¼x2½x1/16") |             |
| Order no.                       | 111 080 001 |

|                                   |             |
|-----------------------------------|-------------|
| Blade 210x60x1,4 mm (8¼x2½x1/32") |             |
| Order no.                         | 111 080 005 |

|                                   |             |
|-----------------------------------|-------------|
| Blade 210x130x1mm (8¼x51/8x1/16") |             |
| Order no.                         | 111 080 002 |

|                |             |
|----------------|-------------|
| Serrated Blade |             |
| Order no.      | 111 095 400 |

|                |             |
|----------------|-------------|
| Leather Pocket |             |
| Order no.      | 111 920 000 |

#### Optional accessories

Height-adjustable wheel-set  
for retrofitting the standard version

|               |             |
|---------------|-------------|
| New version 4 |             |
| Order no.     | 111 089 900 |

|                  |             |
|------------------|-------------|
| Previous version |             |
| Order no.        | 111 089 990 |

|           |             |
|-----------|-------------|
| T-handle  |             |
| Order no. | 111 095 079 |

|               |             |
|---------------|-------------|
| Carrying case |             |
| Order no.     | 111 089 170 |



### Compact Stripper 18 V

NEW battery powered stripper

handy for removing surface coverings, from edges, stairs and other areas that are difficult to access.

#### Technical Specification

|                  |                           |
|------------------|---------------------------|
| Dimensions LxWxH | 420x120x130mm             |
| Weight           | 3.8kg (including battery) |
| Working width    | 120mm                     |

Compact stripper 18V  
in systainer complete with  
2x battery 5.0 Ah 18V,  
1x charging station 230V,  
blade 80x120x0,6mm,  
safety goggles, protective gloves  
handle and allen key  
Order no. 111 120 000



Compact stripper 18V  
in carton complete with  
blade 80x120x0,6mm,  
safety goggles, protective gloves  
handle and allen key  
(without batteries, without charging  
station)  
Order no. 111 120 200



#### Spare parts / accessories

|                          |             |
|--------------------------|-------------|
| Spare blade 80x120x0,6mm |             |
| Order no.                | 111 120 001 |

|                                                |             |
|------------------------------------------------|-------------|
| Replacement battery pack<br>Li-Ion 5.0 Ah 18 V |             |
| Order no.                                      | 111 120 083 |

|                            |             |
|----------------------------|-------------|
| Quick charger 10.8/18 volt |             |
| Order no.                  | 111 120 084 |

|                                                                                                       |             |
|-------------------------------------------------------------------------------------------------------|-------------|
| Battery charging kit consisting of a 10.8/18 volt<br>quick charger and two 5.0 Ah 18 V battery packs. |             |
| Order no.                                                                                             | 111 120 082 |



## FLOOR COVERING REMOVAL

### Chisel Stripper PM 1600

The professional electric chisel with chassis  
Removes parquet, ceramic tiles, rubber and other flooring or roofing material.  
Peels off elastic bonding and pvc coatings.

Important Features:

- adjustable in working angle and height
- anti-vibration rubber handles
- safety switch (Emergency OFF)
- easy to transport with heavy duty rubber wheels

#### Technical Specification

|                                   |                              |
|-----------------------------------|------------------------------|
| Power supply                      | 230 V                        |
| Motor power                       | 1600 Watt (2 hp)             |
| Beat energy                       | 27 Joule                     |
| Working width depending on chisel |                              |
|                                   | 20-300 mm (¾-11¼")           |
| Dimensions HxWxL                  | 100 x 60 x 110 cm            |
|                                   | (39 3/8 x 23 5/8 x 43 1/4 ") |
| Weight                            | 45 kg (99 lbs)               |

complete with flat chisel, wide scraper 100 mm for parquet  
Order no. 111 140 000

#### Spare Blades

|                                       |             |
|---------------------------------------|-------------|
| Flat chisel 300 x 75 mm (11 ¾ x 3")   | 111 140 010 |
| Offset chisel 300 x 75 mm (11 ¾ x 3") | 111 140 020 |
| Wide scraper 300 mm (11 ¾")           | 111 140 030 |
| Wide scraper 100 mm (4")              | 111 140 040 |



### COSMO IV STRIPPER

A powerful stripper for small and medium-sized areas.

The COSMO Stripper works on wooden or concrete surfaces and will remove virtually any substance adhering to the floor. The handle and wheel adjustments allow different settings of the blade to fit the floor, while keeping the handle in a proper operating position.

An ideal addition to the Power Stripper and MASTER MOBIL.

- adjustable cutting angle
- adjustable handle
- machine runs virtually silent with reduced vibration
- big wheels ensure comfort and efficiency
- foldable handle for easy transport

#### Technical Specification

|               |                   |
|---------------|-------------------|
| Power supply  | 230 V             |
| Motor power   | 750 Watt (1,0 HP) |
| Working width | 230 mm (9 1/16")  |
| Weight        | 39 kg (86 lbs)    |

Complete with spare blade 230 x 750 x 1,6 mm (9 1/16"x 3"x 1/16")  
and extension cord 10 m (32')

Order no. 111 840 000

Spare blade 230 x 750 x 1,6 mm (9 1/16"x 3"x 1/16")

Order no. 111 800 107



### MASTER MOBIL II

The powerful motor combined with the revised HYDRAULIC-DIRECT-DRIVE system ensures high output with an extremely low noise level.

The MASTER-MOBIL II is self-propelled (forward and reverse) with unparalleled performance due to its high torque German designed electric motor.

Adjustable guide handle in six positions allows ergonomic operation depending on body size or preferred working position.

Front weight and medium weight can be easily removed for transportation, reducing the net weight of the machine.

Wheel hubs with freewheel option for easy handling and easy pushing of the machine without power connection.

#### Technical Specification

|                            |                  |
|----------------------------|------------------|
| Power supply               | 230V or 120 V    |
| Speed infinitely variable: | 0-16 m/min.      |
|                            | (0-52½ ft/min.)  |
| Empty weight               | 75 kg (174 lbs)  |
| Added weight               | 105 kg (205 lbs) |

complete with 5 different spare blades, front weight,  
extension cable and tool kit 230 V

Order no. 111 802 000

#### Optional Accessories

Additional Weight 27 kg (59.5 lbs)

Order no. 111 801 420



USA Pat. 10,294,683 B2  
Pat. Pend. EU, AUS

# FLOOR COVERING REMOVAL

## STRATO MOBIL IV

Angle of the handle is adjustable to six different positions in order to match the individual height of the operator or preferred working position.  
 Hydraulic driven turning handle control with adjustable comfort grips for easier operation. Increased power through modified hydraulic technology.  
 Adjustable blade holder which allows to adjust the angle of the blade according to the removal conditions in order to ensure best possible removal rates.

### Proven benefits:

- extremely quiet operation
- easy release slide weights on the side of the machine to allow a perfect weight balance according to the job condition
- rounded front weight which ensures the removed materials slide away smoothly without impeding the machine's forward movement

### Technical Specification

|                            |                               |
|----------------------------|-------------------------------|
| Power supply:              | 230 V                         |
| Speed infinitely variable: | 0-23 m/min.<br>(0-75 ft/min.) |
| Net weight:                | 85 kg (187 lbs)               |
| Total weight:              | 190 kg (419 lbs)              |

complete with 5 different spare blades, extension cable,  
 tool kit, trolley base and angle plate 4°  
 Order no. 111 740 000



USA Pat. 10,294,683 B2  
 Pat. Pend. EU, AUS

## JUNIOR Ride-on

Powerful like the big machines!

The new compact version of the ride-on stripper with the best -performance ratio

The forward leaning construction puts the centre of gravitation on the tool itself and allows for optimum stripping performance, normally only achieved by machines twice the size.

### Technical Specification

|               |                             |
|---------------|-----------------------------|
| Power Supply: | 230 V                       |
| Motor Power:  | 2,2 kW                      |
| Speed:        | up to 37 m/min (121 ft/min) |
| Dimensions    |                             |
| Length:       | 1300 mm (51 3/16")          |
| Width:        | 610 mm (24")                |
| Height:       | 1000 mm (39 3/8")           |
| Weight        |                             |
| Net Weight:   | 340 kg (750 lbs)            |
| Side-Weights: | 80 kg (176 lbs)             |
| gross Weight: | 420 kg (926 lbs)            |

Order no. 111 416 000



USA Pat. 10,273,700 B2  
 Pat. Pend. EU, AUS

### SPECIAL FEATURES

Working speed up to 37m/min

With a working speed of up to 37m/min the stripping performance is increased, especially when removing elastic or textile coverings.

Weight of 340 or 420 kg

Weight is essential for optimum stripping performance and traction but weight restrictions are also to be observed for example soil bearing capacity, load capacity of lifts and loading capacity of transport vehicles.

"soft touch" operating handles

The new "soft touch" operating handles allow easy access and fatigue-free work over many hours maintaining an ergonomic seating position. Even less experienced users are able to use the JUNIOR Ride-On without extensive training or experience.

Zero turn radius

Maximum manoeuvrability is achieved via the hydraulic rear-wheel drive together with the front swivel castor. This is especially useful when turning at the end of a room. The zero turn radius increases productivity clearly.

## FLOOR COVERING REMOVAL

### Self-scoring blades

Tough, long lasting, self-scoring blades.  
90° angled self scoring wings.  
Works on vinyl back, soft to medium  
PVC, linoleum, carpet tiles.



| Dimensions   | Thickness | Bevel | Order no.   | Master | Strato | Rideon |
|--------------|-----------|-------|-------------|--------|--------|--------|
| 152 x 102 mm | 1,6 mm    | up    | 111 800 101 | X      | X      |        |
| 200 x 102 mm | 1,6 mm    | up    | 111 800 121 | X      | X      |        |
| 223 x 76 mm  | 1,6 mm    | up    | 111 800 106 | X      |        | X      |
| 223 x 76 mm  | 1,6 mm    | up    | 111 700 108 |        | X      |        |
| 305 x 76 mm  | 1,6 mm    | up    | 111 700 101 | X      | X      | X      |
| 360 x 76 mm  | 1,6 mm    | up    | 111 700 107 | X      | X      | X      |
| 40 x 40 mm   | 2,4 mm    | down  | 111 400 495 |        |        | X      |
| 80 x 40 mm   | 2,4 mm    | down  | 111 400 496 |        |        | X      |

### V-Blades

45° angle. The thickness greatly  
reduces breakage, especially  
on heavily weighted machines



| Dimensions      | Thickness | Bevel | Order no.   | Master | Strato | Rideon |
|-----------------|-----------|-------|-------------|--------|--------|--------|
| 255 x 76 mm     | 2,4 mm    | up    | 111 400 375 |        | X      |        |
| 255 x 76 mm     | 2,4 mm    | up    | 111 400 492 | X      |        | X      |
| 305 x 76 mm     | 2,4 mm    | up    | 111 400 490 | X      | X      | X      |
| 355 x 76 mm     | 2,4 mm    | up    | 111 400 491 | X      | X      | X      |
| 685 x 76 mm     | 2,4 mm    | up    | 111 400 499 |        |        | X      |
| 40 x 40 x 40 mm | 2,4 mm    | down  | 111 700 495 | X      | X      |        |
| 40 x 80 x 40 mm | 2,4 mm    | down  | 111 700 496 | X      | X      |        |

### V-Blades

with a special 40  
mm beveled edge



| Dimensions   | Thickness | Bevel | Order no.   | Master | Strato | Rideon |
|--------------|-----------|-------|-------------|--------|--------|--------|
| 40x205x40 mm | 2,4 mm    | up    | 111 400 395 |        |        | X      |
| 40x225x40 mm | 2,4 mm    | up    | 111 800 109 | X      |        | X      |
| 40x255x40 mm | 2,4 mm    | up    | 111 400 391 | X      |        | X      |
| 40x305x40 mm | 2,4 mm    | up    | 111 400 397 |        | X      | X      |
| 40x355x40 mm | 2,4 mm    | up    | 111 400 393 |        | X      | X      |
| 40x505x40 mm | 2,4 mm    | up    | 111 400 399 |        |        | X      |

| Dimensions   | Thickness | Bevel | Order no.   | Master | Strato | Rideon |
|--------------|-----------|-------|-------------|--------|--------|--------|
| 40x205x40 mm | 2,4 mm    | down  | 111 400 394 |        |        | X      |
| 40x225x40 mm | 2,4 mm    | down  | 111 800 108 | X      |        | X      |
| 40x255x40 mm | 2,4 mm    | down  | 111 400 390 | X      |        | X      |
| 40x305x40 mm | 2,4 mm    | down  | 111 400 396 |        | X      | X      |
| 40x355x40 mm | 2,4 mm    | down  | 111 400 392 |        | X      | X      |
| 40x505x40 mm | 2,4 mm    | down  | 111 400 398 |        |        | X      |

### V-Blades

Pre-cut as well as  
removal of sport floor  
coverings




| Dimensions   | Thickness | Bevel | Order no.   | Master | Strato | Rideon |
|--------------|-----------|-------|-------------|--------|--------|--------|
| 75x155x75 mm | 2,4 mm    | up    | 111 400 370 |        |        | X      |

### Parquet Blade

dynamic shape,  
suitable for all types  
of parquet floors

Standard version  
- galvanized



Special version  
- hardened and coated

especially for parquet floors with  
HDF carrier layer. Due to the  
hardened blade also suitable for  
tiles



| Dimensions   | Version  | Order no.   | Master | Strato | Rideon |
|--------------|----------|-------------|--------|--------|--------|
| Width 200 mm | Standard | 111 800 630 | X      | X      |        |

| Dimensions   | Version | Order no.   | Master | Strato | Rideon |
|--------------|---------|-------------|--------|--------|--------|
| Width 200 mm | Spezial | 111 800 640 | X      | X      |        |

# FLOOR COVERING REMOVAL

## Standard Blades

Works on all glued down carpets, VCT, VAT, rubber tile, cork, re-scraping adhesive, elastomeric coatings.



| Dimensions   | Thickness | Order no.   | Master | Strato | Rideon |
|--------------|-----------|-------------|--------|--------|--------|
| 145 x 102 mm | 1,6 mm    | 111 800 104 | X      | X      | X      |
| 152 x 127 mm | 1,6 mm    | 111 700 102 | X      | X      | X      |
| 254 x 76 mm  | 1,6 mm    | 111 700 103 | X      | X      |        |

## Premium Blades

Ultra high quality spring steel is extra hard for long blade life.



| Dimensions  | Thickness | Order no.   | Master | Strato | Rideon |
|-------------|-----------|-------------|--------|--------|--------|
| 152 x 76 mm | 1,6 mm    | 111 400 210 | X      | X      |        |
| 203 x 76 mm | 1,6 mm    | 111 400 220 | X      | X      | X      |
| 254 x 76 mm | 1,6 mm    | 111 800 103 | X      | X      | X      |
| 304 x 76 mm | 1,6 mm    | 111 400 240 | X      | X      | X      |
| 355 x 76 mm | 1,6 mm    | 111 400 250 | X      | X      | X      |
| 500 x 76 mm | 1,6 mm    | 111 400 255 |        |        | X      |
| 685 x 76 mm | 1,6 mm    | 111 400 260 |        |        | X      |

## Heavy Duty Blades

A heavy duty blade that still has a little flex. Works on VCT, VAT, wood, tile, rubber epoxy, thin-set, elastomeric coatings, scraping thinset, glued ceramic.



| Dimensions  | Thickness | Order no.   | Master | Strato | Rideon |
|-------------|-----------|-------------|--------|--------|--------|
| 152 x 76 mm | 2,4 mm    | 111 400 310 | X      | X      | X      |
| 203 x 76 mm | 2,4 mm    | 111 400 320 | X      | X      | X      |
| 254 x 76 mm | 2,4 mm    | 111 700 104 | X      | X      | X      |
| 304 x 76 mm | 2,4 mm    | 111 400 340 | X      | X      | X      |
| 355 x 76 mm | 2,4 mm    | 111 400 350 | X      | X      | X      |
| 500 x 76 mm | 2,4 mm    | 111 400 355 |        |        | X      |
| 685 x 76 mm | 2,4 mm    | 111 400 360 |        |        | X      |

## Extra Heavy Duty Blades

Ultra tough coatings, ceramic & hardwood Extremely hard, high abrasion wood, tile, lighter ceramic



| Dimensions  | Thickness | Order no.   | Master | Strato | Rideon |
|-------------|-----------|-------------|--------|--------|--------|
| 152 x 76 mm | 4,5 mm    | 111 700 106 | X      | X      | X      |
| 152 x 76 mm | 6,35 mm   | 111 700 105 | X      | X      | X      |

## Increased Angle Blades

Mainly used for VCT, but can be used on most other applications. Supplies more of an angle when needed.



| Dimensions  | Thickness | Order no.   | Master | Strato | Rideon |
|-------------|-----------|-------------|--------|--------|--------|
| 200 x 75 mm | 1,6 mm    | 111 400 480 | X      | X      | X      |
| 250 x 75 mm | 1,6 mm    | 111 400 481 | X      | X      | X      |

## SPECIAL TOOLS AND ACCESSORIES

### Universal Hand Grinder

steel plate with scattered hardmetal fragments welded to the surface

200 x 100 x 25 mm  
(7 7/8 x 3 7/8 x 1")  
90° angled

|         |             |
|---------|-------------|
| Grit 14 | 161 525 000 |
| Grit 24 | 161 526 000 |
| Grit 36 | 161 527 000 |



### Rectangular Grinding Stones

carbide and resin are the basic materials used in these stones

holes in the underside provide sharp edges to assist the grinding action

|         |             |
|---------|-------------|
| Grit 24 | 161 505 000 |
| Grit 36 | 161 507 000 |

Replacement stone

|         |             |
|---------|-------------|
| Grit 24 | 161 505 001 |
| Grit 36 | 161 507 001 |



### Allway Scraper

100 mm (4") blade width with replaceable blade, comes in 2 different lengths.

Short handle 30 cm (1')  
Order no. 139 140 000

Long handle 50 cm (19 3/4")  
Order no. 139 150 000



### Floor Scraper

with Long Fixed Handle

removable two-sided blade is easily replaceable through securing wing nuts.

|                |              |
|----------------|--------------|
| Handle length: | 135 cm       |
| Weight:        | 2.7 kg       |
| Blade width:   | 280 mm (11") |

Order no. 161 201 000

Spare blade 1 pcs 161 201 002



### Janser-Scraper

100 mm (4") blade width with 3 case-hardened screws, comes in 2 handle lengths.

Short handle 30 cm (1')  
Order no. 139 105 000

Long handle 50 cm (19 3/4")  
Order no. 139 106 000



### Janser Hand Scraper

with rotatable handle  
handle length 40 cm (15 3/4")

Order no. 139 108 000

Spare Blades  
for Allway- & Janser scrapers  
10 pcs 139 140 001  
100 pcs 139 140 100



### Floor Scraper MEGA-200

special scraper with heat-treated head for maximum durability for the removal of all types of thick film coatings such as epoxy, VTC and adhesives

|                |                   |
|----------------|-------------------|
| Handle length: | 152 cm (6")       |
| Weight:        | 3.6 kg (8lbs)     |
| Blade:         | 204 mm width (8") |

Order no. 161 206 000

Spare blades , 205 mm (8") width  
10 pcs 161 202 001



### Pulling Claw

Silver, heavy duty and distinguished attractive, ergonomic design.

Made from an almost indestructible aluminium alloy, this pulling claw is an indispensable and unexpectedly powerful aid in the removal of glued-down floor coverings.

Clamping action gives a vicelike grip on material to be removed while protecting fingertips and nails.

Order no. 111 107 000



## TROWELS AND SPREADERS

### Levelling Spreader

stainless, adjustable end gauge 280 mm (11")

Order no. 161 750 000



### Master Trowel with wooden handle

without insert 28 cm (11")

Order no. 262 312 000



### Spreaders

Adhesive Spreaders with wooden handle

|                     |             |
|---------------------|-------------|
| Spreader 18 cm (7") |             |
| Notch profile A1    | 262 344 000 |
| Notch profile A2    | 262 301 000 |
| Notch profile A3    | 262 341 000 |
| Notch profile B1    | 262 307 000 |
| Notch profile B2    | 262 302 000 |
| Notch profile B3    | 262 302 300 |
| Notch profile B5    | 262 302 400 |
| Notch profile B6    | 262 302 600 |
| Notch profile B11   | 262 303 600 |



### Screed trowel with adjustable guide

Working width 58 cm (22 3/4") (6 pins)  
Order no. 161 765 000

Working width 80 cm (31 1/4")  
Order no. 161 766 000



### Pin Levellers

Big Area Trowel without handle, without notch profile  
Width 560 mm (22")

Order no. 161 760 000



### Spreader with rollers

For processing of compounds  
Particularly for fibre-reinforcement levelling compounds

Working width 58 cm (22 3/4") (6 pins)  
Order no. 161 765 800

Working width 80 cm (31 1/4")  
Order no. 161 766 800

### Notch Profiles Double-sided notch



#### A1

|                |     |
|----------------|-----|
| Notch depth mm | 1,1 |
| Notch width mm | 1,5 |
| Tooth width mm | 0,5 |
| Notch angle °  | 55  |

28 cm (11") 10 pcs 262 324 000  
other widths on request



#### A2

|                |     |
|----------------|-----|
| Notch depth mm | 1,4 |
| Notch width mm | 1,7 |
| Tooth width mm | 1,3 |
| Notch angle °  | 55  |

28 cm (11") 10 pcs 262 323 000  
other widths on request



#### A3

|                |     |
|----------------|-----|
| Notch depth mm | 1,5 |
| Notch width mm | 1,6 |
| Tooth width mm | 0,4 |
| Notch angle °  | 45  |

28 cm (11") 10 pcs 262 337 000  
other widths on request



#### A5

|                |      |
|----------------|------|
| Notch depth mm | 1,0  |
| Notch width mm | 1,35 |
| Tooth width mm | 1,45 |
| Notch angle °  | 55   |

28 cm (11") 10 pcs 262 339 000  
other widths on request



#### B1

|                |     |
|----------------|-----|
| Notch depth mm | 2,0 |
| Notch width mm | 2,4 |
| Tooth width mm | 2,6 |
| Notch angle °  | 55  |

28 cm (11") 10 pcs 262 322 000  
other widths on request



#### B2

|                |      |
|----------------|------|
| Notch depth mm | 2,55 |
| Notch width mm | 3,0  |
| Tooth width mm | 2,0  |
| Notch angle °  | 45   |

28 cm (11") 10 pcs 262 321 000  
other widths on request



#### R1

|                |     |
|----------------|-----|
| Notch depth mm | 3,0 |
| Notch width mm | 4,0 |
| Tooth width mm | 1,5 |

28 cm (11") 10 pcs 262 345 000  
56 cm (22") 10 pcs 262 345 800



#### R2

|                |     |
|----------------|-----|
| Notch depth mm | 5,0 |
| Notch width mm | 4,0 |
| Tooth width mm | 2,0 |

28 cm (11") 10 pcs 262 345 700  
56 cm (22") 10 pcs 262 345 900

## STIRRING TOOLS

### Stirring station CLEVER II

with good balance when pouring the self levelling compound, even with larger mixing volumes.

Mixer with 2-speed gearbox and infinitely variable speed setting.

- Height adjustable guide handle
- with special stirrer H27 for fast, homogeneous mixing of leveling compounds

Mix quantity:

4 bags of filler, 25 kg each

corresponds to approx. 60 L mix □ approx. 130 kg

#### Technical Specification

|               |                            |
|---------------|----------------------------|
| Power supply: | 230 V                      |
| Motor power:  | 1900 W (2 ½ HP)            |
| Speed:        | 150-300 rpm<br>300-650 rpm |
| Tool holder:  | M14                        |
| Weight:       | 41 kg (100 lbs)            |
| Container:    | 85 L                       |

comes complete with special stirrer H27 and mixing bucket 85 L

Order no. 111 253 000

#### Spare accessories

|                     |             |
|---------------------|-------------|
| Special stirrer H27 | 111 252 050 |
| Mixing bucket 85 L  | 111 253 150 |



### Hand Mixer Collomix Xo1 HF

Compact 1-speed machine for a wide range of mixing jobs with a capacity of up to 40 litres.

Very easy to use, featuring the very latest ergonomic design. Excellent gearbox ratio and electronic speed control.

#### Technical Specification

|               |             |
|---------------|-------------|
| Power supply  | 230 V       |
| Motor power   | 1150 W      |
| Gears         | 1           |
| Speed         | - 640 rpm   |
| Mixing volume | - 40 litres |
| Weight        | 5,3 kg      |

including mixing tool WK 120 HF

Order no. 111 243 000



### PROFI Stirring Station

Makes it possible to stir and apply up to 75 l of screed quickly and efficiently.

Component parts:

trolley base and 75 l barrel

Order no. 111 214 600



combination device as pre-separator with roller see page 46

#### Spare accessories

Trolley base 111 214 400

Mixing barrel 75 l 111 214 300

Holder 111 214 100

Turbine stirrer 111 214 200

Hose holder 262 362 000



### Stirring machine R 1600 N

New look with proven quality. Now again with the function „locking option of the power switch“, which makes it ideal for use in stirring stations.

#### Function

- locking switch for permanent operation according to DIN EN 62841-2-10
- robust 2-speed gear with high motor ideal for mixing volumes up to 40 l (i.e. levelling compound, tile glue, ready-mixed mortars, plasters, etc.)
- Ergonomic handle with 4 rubber buffers for to place the machine on the floor
- Includes 100 mm extension for convenient stirring while standing

#### Technical Specification

|             |                                            |
|-------------|--------------------------------------------|
| Power:      | 1800 W                                     |
| Gears:      | 2                                          |
| Speed:      | 1.gear: 150-300 rpm<br>2.gear: 300-650 rpm |
| Toolholder: | M14                                        |
| Weight:     | 8.7 kg                                     |

comes complete with stirrer 140 mm and 100 mm shaft extension

Order no. 111 242 500



PROFI Stirring Station complete with holder and stirring machine R 1600 N

Order no. 111 217 000



## TOOLS FOR LAYING SCREED

### Polyplan Spiked Aeration Roller

with splash-guard

|                            |             |
|----------------------------|-------------|
| Spike length 11 mm (7/16") |             |
| 25 cm (10") wide           | 171 801 000 |
| 50 cm (20") wide           | 171 802 000 |
| 75 cm (30") wide           | 171 803 000 |

|                             |             |
|-----------------------------|-------------|
| Spike length 31 mm (1 1/4") |             |
| 25 cm (10") wide            | 171 807 000 |
| 50 cm (20") wide            | 171 808 000 |
| 75 cm (30") wide            | 171 809 000 |



### Spiked Soles

complete with fixing straps

|                             |             |
|-----------------------------|-------------|
| Nail length 55 mm (2 3/16") |             |
| Order no.                   | 171 805 000 |

|                                     |             |
|-------------------------------------|-------------|
| Spare spikes                        |             |
| 55 mm (2 3/16") with nuts Set of 26 |             |
| Order no.                           | 171 805 003 |



### Nail Shoes „Schuh-In“ easy slip on

Shoes are made from high quality, long lasting Elastomer.  
Height of nails: 21 mm

|                                          |             |
|------------------------------------------|-------------|
| M for shoe size 42 (8) and smaller, pair |             |
| Order no.                                | 171 805 500 |

|                                       |             |
|---------------------------------------|-------------|
| L for shoe size 42 (8) - 44 (10) pair |             |
| Order no.                             | 171 805 600 |

|                                          |             |
|------------------------------------------|-------------|
| XL for shoe size 44 (10) - 48 (15), pair |             |
| Order no.                                | 171 805 700 |

|                                     |             |
|-------------------------------------|-------------|
| Spare nails 21 mm (set with 32 pcs) |             |
| Order no.                           | 171 805 701 |



### Pre-coating rollers

|                                |             |
|--------------------------------|-------------|
| Priming role Vestanfloor 25 cm |             |
| Order no.                      | 171 815 000 |

|             |             |
|-------------|-------------|
| Nylon 25 cm |             |
| Order no.   | 464 036 000 |

|                             |             |
|-----------------------------|-------------|
| Moltopren, fine pores 25 cm |             |
| Order no.                   | 171 811 000 |



### Copper tape

10 x 0.08 mm

|                         |             |
|-------------------------|-------------|
| Roll of 50 m (55 yds)   | 161 240 000 |
| Roll of 200 m (219 yds) | 161 245 000 |

10 x 0,035 mm (10x0.001")

|                       |             |
|-----------------------|-------------|
| Roll of 50 m (55 yds) | 161 252 000 |
|-----------------------|-------------|



### AquaFox

Clamp-on 3/4" adapter  
Especially suited for work with levelling compound or fillers when the measuring bucket doesn't fit under the tap.

Fits almost all single-lever mixers and bath tub fittings!

|           |             |
|-----------|-------------|
| Order no. | 111 214 111 |
|-----------|-------------|

### Optional accessories

|                                       |             |
|---------------------------------------|-------------|
| Extension hose 1 m with 90° connector |             |
| Order no.                             | 111 214 115 |



### Janser Porcupine

Put in.clean!

Due to the 15 side-mounted brushes in the bucket, the patented stirrer and tool cleaner saves a lot of time when cleaning stirrers, spiked ventilation rollers, trowels and much more.

The tools can be cleaned directly on the construction site  
Easy and quick to clean

#### Specifications:

|                         |          |
|-------------------------|----------|
| Dimensions ØxH:         | 40x43 cm |
| Filling volume:         | 30L      |
| For stirrers up to max. | Ø 220 mm |



#### Use

Fill the cleaning bucket with water so the upper ring of bristles is about 1-2 cm covered with water. Insert the tool to be cleaned vertically and with slow, circular stirring movements until a sufficient cleaning effect has been achieved.

#### Components

|                                                  |             |
|--------------------------------------------------|-------------|
| 1x outside bucket 30L with splash protection lid |             |
| 1x inner bucket 30L with bristles                |             |
| Order no.                                        | 111 288 000 |

#### Spare accessories

|                            |             |
|----------------------------|-------------|
| Replacement bristles 3 pcs |             |
| Order no.                  | 111 288 010 |

## SUBFLOOR PREPARATION

### Moisture Meter CMEX 5

The new and improved version of the well-established and trusted CMEX2 - moisture meter, NON-DESTRUCTIVE MEASUREMENT IN SECONDS

The CMEX II is a non-destructive meter for measuring moisture content instantly in concrete floors and floor screeds. Incorporating an optional plug-in port for a pin-type wood probe and an RH probe (Hygro-i), this is the ideal all-in-one instrument for the flooring professional.

#### OPERATION

CMEX5 detects and evaluates the moisture conditions within the slab or screed by non-destructively measuring the electrical impedance. A low frequency electronic signal is transmitted into the material under test via the electrodes in the base of the instrument.

The strength of this signal varies in proportion to the amount of moisture present in the material. The CMEX5 determines the strength of the current and converts this to a moisture content value for concrete slabs and a comparative value for other cementitious floor screeds, displayed on a large clear digital dial.

#### Special features

- Determination of moisture content in soil
- Relative humidity and temperature via measuring probe
- Measurement of the relative moisture content in wood with impact electrode

#### NEW

- Hygrometer function to determine the room climate
- with Bluetooth and app function



#### Technical Specification

|            |                    |
|------------|--------------------|
| Size:      | 180x85x40mm        |
| Weight:    | 357g               |
| Housing:   | ABS body           |
| Batteries: | 2 x AALR6 ALKALINE |
| Display:   | digital            |



Moisture meter CMEX 5 complete with 2 x AALR6 ALKALINE batteries  
Order no. 110 376 500

Moisture meter CMEX 5 FZK-set in case complete with measuring probes and various accessories (without smartphone)



Order no. 110 376 000

### Moisture Indicator VI-D4

non-destructive method of accurately determining moisture content in concrete and cement without using pins.

Sensor type: spring pins screen memory

7 available scales:

- Concrete (0-6% H<sub>2</sub>O)
- Cement screed (0-6% H<sub>2</sub>O)
- Cement screed (0-4% CM)
- Anhydrite screed (0-3.5% H<sub>2</sub>O)
- Anhydrite screed (0-1.9% CM)
- Caisson scale (0.3-15.3m)
- Relative scale (0-100%)



The measured value can be called up by pressing the tester lightly

The test device works on the principle of capacitive stray field measurement and allows testing of the moisture conditions in the near-surface region.



Complete with carrying case and with Mini-USB connection for the use of sensors  
Order no. 110 413 000



Accessories with Mini-USB plug for connection to V1-D4

Air sensor for the determination of temperature and humidity

Order-No. 110 413 200



Bullet probe for the non-destructive detection of building moisture

Order-No. 110 413 200



### Moisture Meter CMEX II

The CMEX II is a non-destructive meter for measuring moisture content instantly in concrete floors and floor screeds.

Incorporating an optional plug-in port for a pin-type wood probe and an RH probe (Hygro-i), this is the ideal all-in-one instrument for the flooring professional.

#### SPECIAL FEATURES

- very precise measurements within seconds
- easy to use, easy to read backlit LCD display

3 different operating modes:

- + moisture content determination of concrete and screed
- + relative humidity and temperature measurement with dew point
- + measurement of %-moisture content in wood

4 various integrated scales:

- + concrete/cement screed
- + CM Equivalent (concrete/cement screed)
- + gypsum/gypsum plaster
- + reference scale (e.g. comparison measurements on anhydrite)

measurement - hold function

#### Technical Specification

|               |                                              |
|---------------|----------------------------------------------|
| Size:         | 155 x 85 x 38 mm<br>(6 1/8 x 3 3/8 x 1 1/2") |
| Weight:       | 280 g                                        |
| Construction: | ABS Body                                     |
| Power :       | 9 Volt PP3                                   |
| Display:      | Digital                                      |

Order No. 110 371 100



## WORK ON ELASTIC FLOOR COVERINGS

### KFU 830 Grooving Machine

Versatile grooving machine for all synthetic materials, linoleum and vinyl. Works perfectly on uneven floors guaranteeing professional results. With adjustable lateral edge for rubber nipple flooring. It is recommended to connect a vacuum cleaner.



#### Technical Specification

|                |                  |
|----------------|------------------|
| Power supply   | 230 V or 110 V   |
| Input circuit  | 830 Watt (1 hp)  |
| Revolutions    | 5.000 rpm        |
| Cutting depth  | 0-5 mm (0-3/16") |
| Weight approx. | 4.5 kg (10lbs)   |



comes in metal carrying case complete with 1 HM blade 12 teeth Ø130 x 3.2 mm (5 1/8 x 3/16") elliptical, xtool kit

|       |             |
|-------|-------------|
| 230 V | 223 920 000 |
| 110 V | 223 920 800 |

#### Spare blades

HM grooving blade Ø 130 x 3,2 mm (5 1/8 x 1/8"), 12 teeth 223 920 001

Diamond gooving blade Ø 130 x 3,5 mm (5 1/8 x 1/8") 223 920 002

### KFU 1000 E Grooving Machine

#### Speacial features:

chippings disgarded at the rear of the machine infinitely variable revolutions (8,000-15,000 rpm) large dust bag is easily removed for emptying, variable cutting depth from 0-4.5 mm (0-3/16")



#### Technical Specification

|                |                      |
|----------------|----------------------|
| Power supply   | 230 V or 110 V       |
| Input circuit  | 900 Watt (1.21HP)    |
| Weight approx. | 4.9 kg (10.9 lbs)    |
| Revolutions    | (8.000 - 15.000 rpm) |
| Cutting depth  | 4.5 mm (3/16")       |

comes in carrying case complete with one elliptical grooving blade Ø 120 x 3.6 mm (4 1/16 x 1/8") and dust bag

|       |             |
|-------|-------------|
| 230 V | 223 951 000 |
| 120 V | 223 951 800 |

#### Spare blades

Diamond grooving blade for safety floorings Ø 120 x 2.4 x 20 mm (4 1/16 x 1/16 x 13/16") Order no. 223 950 300

HM grooving blade 12 teeth, elliptical Ø 120 x 3.3 x 20 mm (4 1/16 x 1/8 x 13/16") Order no. 223 950 200

Ø 120 x 3.6 x 20 mm (4 1/16 x 1/8 x 13/16") Order no. 223 951 300

Ø 120 x 4.3 x 20 mm (4 1/16 x 3/16 x 13/16") Order no. 223 950 100

### Cordless Grooving Machine GROOVER 500-LP

for maximum flexibility (incl. 2 batteries)

#### Characteristics:

- Universal grooving blade for plastic and natural coverings
- LED light to illuminate the grooving area
- Roll for reliable grooving, even on uneven floors
- Side stop for grooving along rails
- Three-point support for best balance
- Adjustable roller for safe grooving on knob-coverings
- Optimized tracking role for exact positioning

Can be used with a dust bag or suction device



#### Technical Specification

|                         |                     |
|-------------------------|---------------------|
| Battery voltage         | 18V                 |
| Battery capacity        | Li-Ion 5.0 Ah       |
| Idle speed              | 5.000 rpm           |
| Grooving blade          | Ø 130 mm (5 1/8")   |
| Weight (incl. dust bag) | 5.5 kg (12.1 lbs)   |
| Grooving depth          | 0 - 6 mm (0 - 1/4") |
| Charger                 | 230 V               |

Comes complete in a transport case, device incl. battery, 1 spare battery, universal HM grooving blade 3.5 mm, charger 230V, dust tube, dust bag, vacuum cleaner adapter (connection Ø 27 & 36 mm)

Order no. 223 880 000

#### Spare blades

PCD grooving blade Z6 conical 3.5 mm (3/16") 223 880 010

Tungsten carbide grooving blade Z12 parabola form 2,8 mm (1/8") 223 880 020

3,5 mm (3/16") 223 880 030

### Grooving Machine GROOVER

Perfect turbine technology dust extraction

3-point-support

Adjustable roll for rubber nipple flooring

2-level-speed control: 14.000 + 18.000 rpm



#### Technical Specification

|                          |                   |
|--------------------------|-------------------|
| Power supply             | 230 V             |
| Motor power              | 700 Watt (1HP)    |
| Weight ca.               | 6.5 kg (14.4 lbs) |
| Adjustable cutting depth | 0-4 mm (0-3/16")  |

complete with carrying case and trapezoid blade Ø 110 x 3.5 mm (4x3/16"), dust bag

230 V 223 870 000

#### Spare blades

HM grooving blades Ø110mm (4") Trapezoid 3.5 mm (3/16") 223 800 001

HM grooving blades Ø110mm (4") Semicircular 2,8 mm (1/8") 223 800 005  
3,5 mm (3/16") 223 800 030  
4.0 mm (3/16") 223 800 032

Diamond blade Ø110mm (4") Semicircular 3,5 mm (3/16") 223 800 020

## WORK ON ELASTIC FLOOR COVERINGS

### Leister Hot Air Welding Gun TRIAC ST

Cooled protective tube guarantees more working safety.  
Both air filters can be easily removed and cleaned which means optimal airflow and performance.

#### Technical Specification

|              |                          |
|--------------|--------------------------|
| Power Supply | 230 V                    |
| Power        | 1600 W (2.14 hp)         |
| Temperature  | 40 - 700 °C (104-1292°F) |
| Air flow     | 240 l/min.               |
| Weight       | 1.0 kg (2.2 lbs)         |

complete in carrying case with regular nozzle

230 V 224 828 000

Heating element 1550 W for TRIAC ST  
230 V 224 828 001



### Leister Hot Air Welding Kit TRIAC ST

complete with carrying case/systainer and accessories: grooving tool, regular nozzle, speed nozzle, roller, Mozart trimming knife incl 5 blades, cleaning brush, wire cleaning brush

230 V 224 828 500



### Standard Welding Nozzles

Regular Nozzle  
for Leister TRIAC

Order no. 224 800 002

Speed Nozzle  
for 4 - 5 mm (3/16") welding rod

Order no. 224 700 100

ULTRA Speed Nozzle  
For 5 mm (3/16") welding rod  
Specially designed for PO-, PVC, and  
PU-coated floor coverings and reduced and  
repositioned air slot openings.  
(See enlarged picture)

Order no. 224 800 007

ULTRA Nozzle  
with rounded Nose

For welding crownings and tire grooves  
Order no. 224 800 013

PUR Pressure Roller

Roll-Ø 25 mm (1") For heat welding polyurethane (PU)  
coated PVC floors The PUR pressure roller is simply  
attached to the ULTRA speed nozzle. Guarantees solid  
seam and no damage to the PU coating.

Order no. 225 810 200



### Special Welding Nozzles

Speed Weld Nozzle  
For wall coverings

Order no. 224 700 300



### Finishing nozzles

FIN - Nozzle For use with regular nozzle.  
Hot air blows out of two holes for easy  
welding in corners and curves.

Order no. 224 810 050



Swan-Neck-Nozzle Fits onto regular  
nozzle, for pressing cord  
into edges and internal corner joints

Type 1 224 810 040

Type 2 224 810 060



### Leister Industrial Hot Air Blower ELECTRON ST

#### Technical Specification

|                         |                      |
|-------------------------|----------------------|
| Power supply            | 230 V or 120 V       |
| Connection cable length | 3 m (9' 10")         |
| Temperature             | up to 650°C (1202°F) |
| Weight approx.          | 1.1 kg (2.6 lbs)     |

complete with case and adjustable  
electronic control and heating element

230 V 226 114 000



# WORK ON ELASTIC FLOOR COVERINGS

## EASYFLOOR

Precise hand welding thanks to device holder suitable for Leister TRIAC

Manual joint welding in plastic PVC flooring, as well as natural flooring made of linoleum and rubber, becomes child's play with the help of the EASYFLOOR holder.

Thanks to the adjustable angle and precise guidance of the TRIAC hot air blower, users achieve constant welding zone preheating and increased weld quality during manual welding.

- Stable, precise hot air blower guide
- Safe welding position when joint closing
- Easy closing of resilient floor coverings
- Fatigue-free manual joint welding
- Holder for safe positioning of the hot air hand tool

Order no. 224 828 400



## Drive machine MINIFLOOR

automatic welder for resilient floor coverings.

The drive unit with integrated adapter for your existing hand welding unit is the clever solution for flooring professionals and beginners. It is ideal for short joints or small and medium objects. The MINIFLOOR turns your hot-air hand tool into an automatic welder within seconds; increases the weld quality, facilitates work, and reduces time considerably.

### Technical Specification

|                     |                                                |
|---------------------|------------------------------------------------|
| Power supply:       | 230 V                                          |
| Driving speed:      | 0,5 - 5 m/min.                                 |
| Dimensions (LxWxH): | 310x225x245 mm<br>(12 3/16" x 8 7/8" x 9 5/8") |
| Weight:             | 5,3 kg (11,68 lbs)                             |

without welding gun  
230 V 225 880 000



## Automatic welder UNIFLOOR 500

automatic, efficient, quiet

Leister's reliable automatic floor welder, UNIFLOOR 500, is a fresh and reimagined version of the proven UNIFLOOR E/S models. Suitable for welding the joints in resilient floor coverings made of plastic such as PVC, CV, PUR, antistatic ESD floors, as well as for sealing the joints in natural coverings made of linoleum and rubber.

### Technical Specification

|                                           |                |
|-------------------------------------------|----------------|
| Mains connection                          | 230 Volt       |
| Power                                     | 2300 Watt      |
| Weight including roll holder and 3m cable | 15,5 kg        |
| Speed                                     | 0.7-7,5 m/min  |
| Air flow range                            | 45-100 %       |
| L x W x H                                 |                |
| including roll holder                     | 562x289x440 mm |
| Nozzle air slide small                    | 1.6 mm         |

comes complete with rod de-reeler, nozzle positioning gauge Storage case, Hex key size 3, Torx key size 15

230 V 225 862 000



## WORK ON ELASTIC FLOOR COVERINGS

### Wheeled Super Groover

The wheeled super groover is a box groover ideal for small and medium areas.

It also works well on safety floorings.

The blade is adjustable in height to enable uniform grooving at various depths. complete with 5 spare blades

Order no. 262 611 700

Spare blades 10 pcs 262 606 000



### Groover BEETLE

Equipped with two height adjustable blades for uniform grooving of PVC or Linoleum.

One front blade to cut the surface and the rear blade to be used against the wall.

Order no. 262 611 900

Spare blade 3,5 mm (1/8")

Front blade (1 pcs) 262 611 910

Rear blade (1 pcs) 262 611 920



### Groover QUICKY

with rapid-change mechanism for blade, with 4 spare blades

Order no. 262 605 500

Spare blades 10 pcs

Order no. 262 606 000



### P-Type Groover

with 5 spare blades

Order no. 262 605 000

Spare blades 10 pcs

Order no. 262 606 000



### Adjustable Groover Special

Order no. 262 608 500

Spare blade 1 pcs

Order no. 262 608 001



### Triangular Scraper

Order no. 262 607 000

Spare blade, 1 pcs

Order no. 262 607 001



### Corner Roller

fitted with brass wheel roll- Ø 20 mm (3/4"),

Order no. 262 615 000



### Silicon-Roller

for overlaps up to 40 mm (1 1/2") Ø 32 x 40 mm (1 1/2 x 2")

Order no. 224 400 122

### MOZART Trimming Knife

with integrated precut slide complete with distance bracket 0,5 and 0,7 mm

Order no. 262 636 000

Spare parts

Spare blade (5 pcs) 262 636 110

Distance bracket 0,5 mm 262 636 200

Distance bracket 0,7 mm 262 636 300

precut with slide in place



Swing slide out for trimming cut



### Quarter Moon Knife

Order no. 262 621 000



### Xacto Tool

with aluminium handle and E1 blade, for trimming welding rod in skirtings or cove-caps

Order no. 262 610 000

Spare blades (1 pcs)

Blade E1 262 610 001

Blade E2 262 610 002

Blade E3 262 610 003

Blade E4 262 610 004



### Trimming Tool RDP

For trimming welding cord in roundings, or outer edges as well as for cove-base jobs.

The special blade ensures that the floor covering won't be damaged. with 2 spare blades

Order no. 262 635 000

Spare blades (5 pcs)

Order no. 262 635 100



### PVC Cold Welding

Tube Type A: PVC Cold Welding Liquid For welding of tight-cut PVC seams (double-cut).

The incorporated metal pin enables the penetration of the welding liquid deep into the seam so that the entire seam is welded together.

Advantages of the welded seam:

- waterproof, long lasting
- no shrinking and rising of the joint borders
- hardly visible
- shelf life of at least two years

Tube type A - 44g (50ml)

sufficient for approx. 20m (33 yds)

Order no. 262 650 000

Box for dispatch / display 30 tubes of 44g (50 ml) each

Order no. 262 650 500



## CUTTING OF ELASTIC & TEXTILE FLOOR COVERINGS

### GREEN KNIFE



#### GREEN KNIFE Safety Knife

Comes in plastic holder and green box with 20 straight H/D blades.  
Order no. [262 040 900](#)



Plastic holster, green  
Order no. [262 040 001](#)



#### TUNA Safety Knife

with magnets inside the knife and in the front for best blade stability

Delivered in plastic holster without blades  
Order no. [262 010 900](#)



#### DOLPHIN® Safety Knife

One of the most popular professional safety knives for cutting carpet, pvc, underlay and other flooring material. With integrated blade chamber. Save storage in plastic holster.

Delivered in plastic holster without blades  
Order no. [262 010 200](#)



#### L 2000P Deluxe Cutter Knife

Heavy duty metal finish with 2-blade cartridge.

Comes with 2 blades  
Order no. [262 022 000](#)

#### Snap-off Blades

for Cutting Knives

Snap-off blades, straight 18 mm (3/4")  
Dispenser contains 10 blades

Pack of 10 dispensers = 100 blades  
Order no. [262 020 400](#)

Janser



### GREEN BOX



#### Original GREEN BOX blades

Ice-hardened, 0,65 mm (<1/16"), Grade 1A quality in eco-friendly plastic dispenser. fits safety knives Flipper, Harlekin and Green Knife

Used blades are disposed of in the GREEN BOX.

Pack of 5 dispensers.  
Each dispenser contains 20 blades (100 blades total)



Straight H/D blades 50 mm (2")  
Order no. [262 035 500](#)



Straight H/D blades 60 mm (2 3/8")  
Order no. [262 038 500](#)

Hooked blades  
Order no. [262 036 500](#)

Deep hooked blades  
Order no. [262 037 500](#)

Dual edge sharpened blades  
Order no. [262 034 500](#)

Concave blades  
Order no. [262 039 500](#)

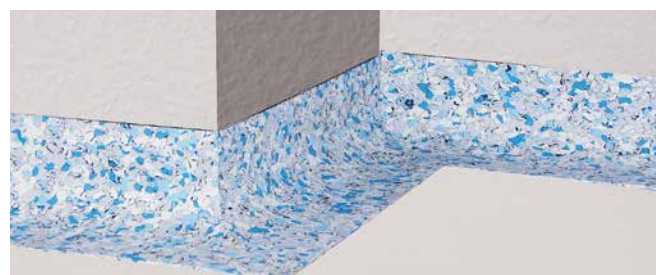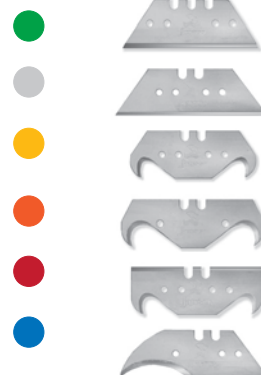

#### Corner Template

For precise cutting of inner- and outer corners for PVC or linoleum installations.

Guarantees perfect result of corners, edges and skirtings.

comes with left and right side template

for 60 mm (2 3/8") skirting height  
Order no. [262 147 000](#)

for 100 mm (4") skirting height  
Order no. [262 148 000](#)



## CUTTING OF ELASTIC & TEXTILE FLOOR COVERINGS

### Perfect Cutter

Edge-cutting tool for textile, PVC and CV coverings  
Special installation tool for perfect edge-cutting due to angled blade position.

Adjustable height to match the thickness of the floor covering and adjustable cutting-depth ensure that only the covering is cut and not the sub-floor. This helps to protect blades.

complete with 10 hooked  
and 10 straight snap-off blades  
Order no. 262 020 900



### LINOCUTTER

Cutting depth and cutting width are infinitely adjustable. Straight blades for scribing and hook blades for cutting of thin coverings.

Works with standard blades, which saves a lot of cost and pays for the tool over time.  
Order no. 262 412 500



### Carpet Cutter

with hold-down slide, for textile floor coverings with foam backing

complete with 10 two-hole blades  
Order no. 262 254 000

Spare two-hole blades 10 pcs  
Order no. 262 255 000



### Strip Cutter

adjustable from 45 to 100 mm (1 3/4 - 4")  
Order no. 262 266 000

Spare industrial blades  
Pack of 10 dispensers = 100 blades  
0.4 mm (<1/16")  
Order no. 262 120 000



### Lino- and PVC-Strip Cutter

for the cutting of cove bases, strip patterns and stair work

for Strip widths 0-11 cm (0 -4")  
Order no. 262 246 500

for Strip widths 3-20 cm (1 3/16 -8")  
Order no. 262 246 000

for strip widths 6-30 cm (2 3/8 - 12")  
Order no. 262 247 000

Spare blades, large and small, 5 pairs  
Order no. 262 247 100

Spare crosspiece  
Order no. 262 246 002



### Base Edge Trimmer ARASEUR

Order no. 262 259 000

Spare Blades Straight blades, 10 pcs  
Order no. 262 260 000

Spare Hooked blades, 10 pcs  
Order no. 262 261 000



### Hole Punch

Ø 30 mm  
Order no. 262 157 000



### Steel Rulers

10 cm (4") width,  
Length 210 cm (6' 10 11/16")  
Order no. 262 206 000

Length 410 cm (13' 5 3/8")  
Order no. 262 207 000



### Combi Scriber

Order no. 262 130 000

Spare blades / spare pins  
5 blades 262 415 001  
20 pins 262 126 000



### Seam Scriber

Order no. 262 125 000

Spare pins 20 pcs  
Order no. 262 126 000



### Miniket Shears

Top selling carpet shears with plastic coated handle especially designed to cut curves and along walls

with offset handle Length 22 cm (8 1/2")  
Order no. 262 274 000



### Carpet Shears

Premium quality with pvc coated handles  
26 cm (10 1/4") 237 534 000  
30 cm (12") 237 533 000



### 3-Finger Napping Shears

18 cm (7") 237 536 000



### Gripper Shears

Order no. 237 530 000

Spare blade 237 530 001



### Mitre Shears

with mitre guide  
Order no. 262 280 000

Spare blade 262 280 001



## STRETCHING TOOLS

### Knee Kicker Deluxe

Order no. 237 405 000



### Iron

Fully grooved with built-in heat shield and thermostat with four settings, Teflon base complete with stand

230 V 237 000 500



### Iron kit complete

metal iron complete with carrying case, with stand, one 20 m (22 yds) roll of standard heat bond tape, 10 m (11 yds), extension lead

230 V 237 000 000



### Power Stretcher - Swivel Head

complete with carrying case, 4 extension tubes up to 7 m (7 ½ yds), with two heads, fine pinned cotton head and coarse pinned head plate

Order no. 237 410 000



### Tack and moulding lifter

237 540 000



### Stair Tools

7 cm (2¾") 237 542 000  
9 cm (3½") 237 542 100



bent, for working underneath radiators  
Order no. 237 542 001

## PRESS-ON TOOLS

### Pressure Roller

detachable handle and galvanized rollers,

complete with protector caps

\* (\*30 kg and 50 kg pressure rollers only)

#### Pressure Roller 80 kg (176 lbs)

|                |                     |
|----------------|---------------------|
| 4 parts        |                     |
| Weight approx. | 80 kg (176 lbs)     |
| Roll-Ø         | 160 mm (6 ¼")       |
| Total width    | 510 mm (1' 8 1/16") |

Order no. 262 400 000

#### Pressure Roller 50 kg (110 lbs)

|                |                 |
|----------------|-----------------|
| 4 parts        |                 |
| Weight approx. | 50 kg (110 lbs) |
| Roll-Ø         | 120 mm (4¾")    |
| Total width    | 510 mm (20")    |

Order no. 262 391 000



### Wall / Floor Roller

with telescopic extendable handle

Order no. 262 403 000



### Pressing Hammer

Order no. 262 378 000



### Cork Press

with wooden handle  
300 x 137 x 25/40 mm  
(11¾ x 5 3/8 x 1/ 1½")


Order no. 262 381 000



### Rubber Hammer

Black 262 467 000

White (non-marking) 262 468 000



### Seam Roller

single axle with star wheel roller

Order no. 237 100 000



## INSTALLATION AIDS FOR PVC DESIGN FLOORING

### Installation Kit

for LVT design flooring

All necessary tools and installation aids for laying design flooring are included.

comes in systainer complete with  
1 edge strip master  
1 bevelling master  
1 multi-roller  
1 safety knife Flipper 3000  
3 straight blades 50 mm PU 20 pcs  
1 straight blades 50 mm PU 20 pcs, Titan  
1 concave blades PU 20 pcs  
1 professional pen „Green Pen“  
1 deep hole marker „Blue Mark“  
1 mitre template  
1 mitre shear  
1 folding rule

Order no. 262 244 100



### Pressure Roller Triple-Flex

New generation of pressure rollers especially for elastic and design coverings.

The particular features of these new pressure rollers are the mechanics of the rollers, their universal use and their ergonomic handling.

available in two widths:

Triple-Flex 150 - width 150 mm  
Order no. 262 396 000

Triple-Flex 300 - width 300 mm  
Order no. 262 397 000



### Design Cutter DS-333

Cuts all kinds of design coverings fast, accurate, quiet, dust-free and without electrical connection.

Suitable for LVT, Cork, Carpet Tiles, CV, Rubber

NEW: with improved stop and extendable table

#### Technical Specification

|                         |                           |
|-------------------------|---------------------------|
| Cutting width           | 330 mm (13")              |
| Cutting angle           | 0-45°                     |
| Max. material thickness | 6 mm (1/4")               |
| LxWxH                   | 620 x 430 x 200 mm        |
|                         | 34 3/8 x 16 7/8 x 7 7/8") |
| Weight                  | 7.0 kg (15.5 lbs)         |

Order no. 222 446 500

Spare blade 222 446 001



## MEASURING TOOLS

### Laser distance meter SMART 40

SMART 40 is characterized by an extended measuring range of 40m with accuracy 1,5 mm.

Apart from measurement of length, area/ volume calculation, it has a Pythagoras function.

Results are shown on the large 3-line inverted display.

#### Technical Specification

|                |                  |
|----------------|------------------|
| Working range: | 0,05-40 m        |
| Accuracy:      | ± 1,5 mm         |
| Dimensions:    | 105 x 47 x 27 mm |
| Weight:        | 83 g             |

Standard package: laser distance meter, pouch with a hand strap, batteries, user manual.  
Order no. 270 501 100



### Design Cutter DS-241

cuts planks up to a width of 24 cm and a material thickness of up to 12 mm

Easy transport to the construction site in the integrated transport case (Cutting table = transport case)

#### Technical Specification

|                    |                                 |
|--------------------|---------------------------------|
| Material thickness | max. 12 mm (1/2")               |
| Cutting width      | max. 241 mm (9 1/2")            |
| Weight             | 6,3 kg (13,9 lbs)               |
| LxWxH:             |                                 |
| Table / case       | 60,0 x 5,0 x 22 cm              |
|                    | (23 5/8" x 1 15/16" x 8 11/16") |
| Cutter             | 55,5 x 2,5 x 20 cm              |
|                    | (21 7/8" x 1" x 7 7/8")         |

Order no. 222 420 000

Spare blade 222 420 010



## CUTTING GUILLOTINES

### STRATICUT

cuts material up to 10 mm (3/8")

- quick and easy to use
  - safe blade, no waste of energy
  - mini trestle for long boards
  - no noise or dust on the job site
- ideal for cutting laminate flooring and MDF  
cuts neatly without damaging melamine overlay



#### Technical Specification

|                    |                 |
|--------------------|-----------------|
| Length             | 68 cm (2')      |
| Weight :           | 6.5 kg (14lbs)  |
| Cutting width max. | 210 mm (8 1/4") |

complete with balancing  
block 476 000 100

#### Accessories

Radial stop 476 000 120

### Parquet Cutter LX-340

uses: prefinished wood flooring, vinyl material,  
wood moldings, laminate, etc.

- fast and precise
- quiet and dust-free
- lightweight and portable
- long-lasting and economical
- with built-in laser and mitre-guide



#### Technical Specification

|                       |                              |
|-----------------------|------------------------------|
| Blade length          | 375 mm (14 3/4")             |
| Cutting capacity max. | 9,5 x 340 mm (3/8 x 13 3/8") |
|                       | 20 x 200 mm (3/4 x 7 7/8")   |
| Dimensions            | 1066 x 524 x 463 mm          |
|                       | (42 x 20 5/8 x 18 1/4")      |
| Weight                | 13,3 kg (29.32 lbs)          |

LX 340 476 000 900

Spare blade 476 000 910

### MAGNUM Cutting Guillotines

For cutting laminate, wood, plastic and rubber flooring,  
object-carpet tiles, cork, etc.

max. cutting height up to 24 mm (1")

Improved version with integrated laser cutting line.  
Cuts fast with little effort, precise, free of dust and noise.  
Clean cut without splintering and chipping.

Best for cutting laminate flooring, pre-finished parquet,  
design flooring such as Amtico, Scala, PVC, cork tiles, etc.

#### I-series:

- reduced weight
- better stability via twofold I-profile
- equipped with large premium quality knife
- automatic safety lock for lever



### MINI MAGNUM I-Series 33

#### Technical Specification

|                |                  |
|----------------|------------------|
| Cutting length | 33 cm (13")      |
| Weight         | 16,7 kg (37 lbs) |

Order no. 222 421 000

Spare blade for Magnum I 33  
Cutting length  
33 cm (13") 222 421 001



### MAGNUM I-Series 50

#### Technical Specification

|                |                   |
|----------------|-------------------|
| Cutting length | 50 cm (19 11/16") |
| Weight         | 19 kg (42lbs)     |

Order no. 222 422 000

Spare blade for Magnum I 50  
Cutting length  
50 cm (19 11/16") 222 422 001



### BULLET Shears

Dust-free and quiet work with precise cut!  
Cutting guillotines for design flooring (LVT), rubber

Max. Material thickness 14 mm (9/16")

### BULLET Shear 33 cm

#### Technical Specification

|                     |                   |
|---------------------|-------------------|
| Cutting length max. | 33 cm (13")       |
| Cutting height max. | 14 mm (9/16")     |
| Weight              | 9,4 kg (20,7 lbs) |

Order no. 222 449 300

Spare blade  
33 cm (13") 222 449 301



### BULLET Shear 50 cm

#### Technical Specification

|                     |                    |
|---------------------|--------------------|
| Cutting length max. | 50 cm (19 11/16")  |
| Cutting height max. | 14 mm (9/16")      |
| Weight              | 12,8 kg (28,2 lbs) |

Order no. 222 449 500

Spare blade 50 cm (19 11/16"  
Order no. ) 222 449 501



### BULLET Shear 66 cm

#### Technical Specification

|                     |                    |
|---------------------|--------------------|
| Cutting length max. | 66 cm (26")        |
| Cutting height max. | 14 mm (9/16")      |
| Weight              | 16,1 kg (35,5 lbs) |

Order no. 222 449 600

Spare blade 66 cm (26")  
Order no. 222 449 601



PARQUET SANDING MACHINES AND ACCESSORIES

**Tiger Belt Sander**

with "Bag-in-bag" dust bag system

Two drum speeds for coarse and fine sanding  
gear=2000 rpm  
gear=2300 rpm

**Special features**

Advanced belt adjustment system  
Integrated carrying handle.  
Height adjustable operation handle.  
Variable drum pressure.  
Dismantled in seconds for transportation (3 pcs)

**Technical Specification**

|                |                               |
|----------------|-------------------------------|
| Power supply   | 230 V or 120 V                |
| Motor power    | 2200 Watt (3 hp)              |
| Abrasive width | 200 mm (8")                   |
| Sanding belts  | 750x200mm<br>(29 1/4"x7 3/4") |
| Drum speed     | 2000 + 2300 rpm               |
| Weight         | 78 kg (172 lbs)               |

230 V 458 000 000



**Tiger**

**Panda Stair and Edge Sanding Machine**

with "Bag-in-bag" dust bag systemwith "Bag-in-bag" dust bag system

**Special features**

Compact design, ergonomic shape, precise control, outstanding suction performance, meets safety standards.  
Especially designed for sanding floor edges, wooden stairs and areas difficult to reach.

**Technical Specification - short extension**

|               |                     |
|---------------|---------------------|
| Power supply  | 230 V or 120 V      |
| Motor power   | 1150 Watt (1.5 hp)  |
| Sanding discs | Ø 150 mm (6")       |
| Extension     | 130 mm (5")         |
| Weight        | 7.9 kg (17 1/2 lbs) |

with 130 mm (5") extension  
230 V 454 000 000



**Panda**

**Technical Specification - long extension**

|               |                    |
|---------------|--------------------|
| Power supply  | 230 V or 120 V     |
| Motor power   | 1150 Watt (1.5 hp) |
| Sanding discs | Ø 150 mm (6")      |
| Extension     | 350 mm (13 3/4")   |
| Weight        | 8 kg (17 1/2 lbs)  |

with long 350 mm (13 3/4.) extension  
230 V 454 500 000



**Panda**

## PARQUET SANDING MACHINES AND ACCESSORIES

### Janser Sanding Belts

for TIGER / LEOPARD / Hummel / Viper  
750 x 200 mm (29½ x 8")

Standard Quality

pack of 10 pcs

|          |             |
|----------|-------------|
| Grit 16  | 441 719 000 |
| Grit 24  | 441 720 000 |
| Grit 30  | 441 721 000 |
| Grit 36  | 441 728 000 |
| Grit 40  | 441 722 000 |
| Grit 50  | 441 723 000 |
| Grit 60  | 441 725 000 |
| Grit 80  | 441 726 000 |
| Grit 100 | 441 727 000 |
| Grit 120 | 441 729 000 |

TOP-Quality

pack of 10 pcs

|          |             |
|----------|-------------|
| Grit 16  | 441 770 000 |
| Grit 24  | 441 771 000 |
| Grit 36  | 441 773 000 |
| Grit 40  | 441 774 000 |
| Grit 50  | 441 775 000 |
| Grit 60  | 441 776 000 |
| Grit 80  | 441 777 000 |
| Grit 100 | 441 778 000 |
| Grit 120 | 441 779 000 |

Premium-Quality ZIRKON

With zirconium corundum and extremely wear-resistant Y-cloth-backing.

pack of 10 pcs

|          |             |
|----------|-------------|
| Grit 24  | 441 710 000 |
| Grit 36  | 441 711 000 |
| Grit 40  | 441 712 000 |
| Grit 60  | 441 713 000 |
| Grit 80  | 441 714 000 |
| Grit 100 | 441 715 000 |
| Grit 120 | 441 716 000 |

Premium-Quality CERAMIC

pack of 10 pcs

|         |             |
|---------|-------------|
| Grit 36 | 441 780 036 |
| Grit 60 | 441 780 060 |



### Velcro Sanding Discs Ø150mm

for Edge Sanding Machines Panda  
Ø 150 (5 7/8)

Standard Quality

pack of

|          |      |             |
|----------|------|-------------|
| Grit 16  | (25) | 444 101 100 |
| Grit 24  | (25) | 444 101 200 |
| Grit 36  | (25) | 444 101 400 |
| Grit 40  | (50) | 444 101 500 |
| Grit 60  | (50) | 444 101 600 |
| Grit 80  | (50) | 444 101 700 |
| Grit 100 | (50) | 444 101 800 |
| Grit 120 | (50) | 444 101 900 |

TOP Quality

pack of

|          |      |             |
|----------|------|-------------|
| Grit 16  | (25) | 444 802 016 |
| Grit 24  | (25) | 444 802 024 |
| Grit 36  | (25) | 444 802 036 |
| Grit 40  | (50) | 444 802 040 |
| Grit 60  | (50) | 444 802 060 |
| Grit 80  | (50) | 444 802 080 |
| Grit 100 | (50) | 444 802 100 |
| Grit 120 | (50) | 444 802 120 |

Premium Quality ZIRCON

pack of

|          |      |             |
|----------|------|-------------|
| Grit 24  | (25) | 444 804 024 |
| Grit 36  | (25) | 444 804 036 |
| Grit 40  | (50) | 444 804 040 |
| Grit 60  | (50) | 444 804 060 |
| Grit 80  | (50) | 444 804 080 |
| Grit 100 | (50) | 444 804 100 |
| Grit 120 | (50) | 444 804 120 |

Premium Qualit CERAMIC

pack of

|         |      |             |
|---------|------|-------------|
| Grit 36 | (25) | 444 801 036 |
| Grit 50 | (25) | 444 801 050 |
| Grit 60 | (25) | 444 801 060 |

### Sanding Discs Ø 150 mm

for Edge Sanding Machines Panda  
Ø 150x12 (5 7/8 x ½")

Standard Quality

pack of

|          |       |             |
|----------|-------|-------------|
| Grit 16  | (25)  | 444 100 290 |
| Grit 24  | (25)  | 444 100 300 |
| Grit 36  | (25)  | 444 100 900 |
| Grit 40  | (50)  | 444 100 500 |
| Grit 60  | (50)  | 444 100 600 |
| Grit 80  | (100) | 444 100 700 |
| Grit 100 | (100) | 444 100 800 |
| Grit 120 | (100) | 444 101 000 |

TOP-Quality: long life

pack of

|          |       |             |
|----------|-------|-------------|
| Grit 24  | (25)  | 444 810 024 |
| Grit 36  | (25)  | 444 810 036 |
| Grit 40  | (50)  | 444 810 040 |
| Grit 60  | (50)  | 444 810 060 |
| Grit 80  | (100) | 444 810 080 |
| Grit 100 | (100) | 444 810 100 |
| Grit 120 | (100) | 444 101 000 |



## INSTALLATION AIDS

### Parquet Shunting Tool

short, 43 cm (17") 440 005 000

long, 55 cm (22") 440 006 000



### Tapping Block

with large grooves

for glued-down  
parquet 464 063 000



### LUKAS®Power Shunting Device

for the efficient installation of parquet,  
laminare, cork, melamine and hardwood  
flooring



advantages:  
time saving, easy to use  
no damage to tongue and groove  
combines shunting and hammering

LUKAS Junior without  
extension 464 091 000

### Melting Putty

This middle hard repairing kit is made for heavily used  
surfaces such as parquet, laminate, cork flooring,  
furniture, kitchen surfaces etc.  
Heated with battery melter and applied in liquid form.  
included in plastic case:

Melting Kit Set 20  
included in plastic case:  
20 pcs. melting putty  
1 hot knife, BATTERY OPERATED  
1 plastic spatula  
1 stripping blade  
1 cleaning cloth for hot knife  
2 sanding fleece 475 020 070



### PROFILE MASTER Templates

In a case with 2 adjustable templates  
which can be joined, enabling  
precise, intricate pattern work.

The PROFILE MASTER helps you save  
time and mark floorboards  
accurately.

Case of 2 templates, 20 cm  
(7 3/4") each and 1 setting angle  
40 cm (15 3/4") 464 066 000



### Carpenter's Template

Size 250 mm (9 3/4") 464 085 000



### Handheld Sanding Machine MULTI-MASTER AMM500 Plus

The powerful MultiTool for rapid work progress  
(in interior work and renovation)

#### Technical Specification

Battery voltage 18 V  
Battery compatibility Li-ion /HighPower  
Li-Ion Battery capacity 3 or 6Ah  
Vibrations 11,000-18,500 rpm  
Weight without battery 1.3 kg

AMM500 Plus - Select  
complete in tool case incl.  
1 x E-Cut saw blade Universal BiM 60x44  
(without battery, without charger)

Order No. 444 304 500

AMM500 Plus - Top  
comes complete in tool case with:  
2x 18V/3Ah batteries,  
1x ALG 80 charger,  
6x E-Cut saw blades,  
1x HM saw blade,  
1x rasp, 1x spatula,  
1x suction,  
1x sanding plate,  
3x5 sandpapers

Order No. 444 304 000



### STARLOCK PLUS



Saw blades with Bi-metal blade  
3 x longer life time!

Using the bi-metal serration is especially suitable for  
dipping into the material as well as for cutting nails.  
Equipped with multi-function adapter for almost all  
delta sanders.

cutting width 35mm (1 3/8") - 5 pcs  
Order No. 444 228 300

cutting width 65mm (2 9/16") - 5 pcs  
Order No. 444 228 700

Precision saw blade  
with japanese tothing and multi-function adapter  
cutting width 35mm (1 3/8") 5 pcs  
Order No. 444 212 600

cutting width 65mm (2 5/8") - 5 pcs  
Order No. 444 210 600



## KNEE PROTECTION

### Knee Pads Multipad

Insertable into trousers,  
made of special polyethene foam  
excellent padding and recovery characteristics  
extremely light weight  
functional shape  
guarantees high comfort

Anthracite, size 240 x 145 x 18 mm  
(9 3/8 x 5 3/4 x 5/8")  
pair 161 102 999



### Knee Pads

Deliver maximum comfort with a tough Cordura  
nylon outer layer and moisture-wicking inner lining  
Knee protectors with rubber caps for hard surfaces

Pair  
with velcro strap 161 106 000



### GEL™ Knee Pads

Long life with air cushioned GEL™-core  
Strong nylon surface  
Extra thick protective padding

CLEAR with velcro fastener  
wide neoprene frame to protect from cutting and  
slipping into knee pits, protection zone with flexible  
PVC cap, versatility  
with flex ribs 161 120 300



### Super Soft Kneepads

Comfortable neoprene is 100% washable and less  
likely to stick and cause rashes  
Strong Velcro front fastener stays in place and  
allows free movement  
Non-marking  
Leather Version  
Heavy duty  
Bigger in size

With added leather 161 124 000



### RedbacksKnee Cushions

Fit directly into pockets of work trousers  
certified in accordance  
with CE DIN EN 14404  
Patented leaf spring and honeycomb  
construction distributes weight  
evenly over a larger area.

pair 161 106 800



### Knee Pads FENTO POCKET

Breathable and comfortable panels with  
excellent cushioning and recovery properties.  
Certified according to CE DIN EN 14404, Type  
2 Level 1.

#### Special Features

- 3D moisture management fabric
- Ergonomic wedge shape for unique pressure distribution
- Breathable
- Water-repellent and hardwearing.
- Comfortable and durable
- Fits practically any work trousers

Delivery in pairs,  
Weight 150g 161 117 000



### Knee pads FENTO ORIGINAL

The all-round knee protector recommended  
by occupational physicians and  
physiotherapists and certified according  
to CE DIN EN 14404.

#### Special Features

Hard-wearing and water-repellent outer layer  
Wide contact surface for maximum stability  
Easy to clean  
Breathable insert distributes the pressure over  
the knees and lower legs, preventing back  
and knee problems  
Replaceable insert

Delivery in pairs  
Weight 250 gr 161 116 000



#### Accessories

Replacement insoles  
(2 pcs.) 161 116 010

Spare straps  
(2 pcs.) 161 112 100



### Knee pads FENTO MAX

Breathable insert distributes the pressure over  
the knees and lower legs to prevent back  
and knee problems.

#### Special Features

Hard-wearing and water-repellent outer layer  
Wide contact surface for maximum stability  
The entire product is easy to clean  
Elastic straps don't pinch behind the knee.

Delivery in pairs  
Weight 500g 161 119 000



#### Accessories

Replacement insoles  
(2 pcs.) 161 119 010

Spare straps  
(2 pcs.) 161 112 200



### FENTO BOARD

The knee pillow is easy to clean and has a  
durable outer layer, light enough to move  
around with ease and heavy enough not to  
slip when you kneel.

#### Special Features

Great mobility thanks to the handle on the top  
Wide contact surface for maximum stability

Material 100% two-piece PU foam,  
Dimensions LxWxH 495x280x46mm  
Weight 1250g 161 114 500



## MARKING TOOLS



### TRACER deep hole pencil in holster

Mult purpose pencil with fully extendable lead for marking up to 145mm depth.

Order no. 262 488 000



### TRACER kit with pencil and lead set

Deep hole pencil in holster and replacement leads (4 x 2B graphite, 2 x yellow).

Order no. 262 488 200



### TRACER Marker in holster

Multipurpose permanent construction marker pen with reversible double tip for marking up to 50 mm (2») depth.

Order no. 262 488 300



### TRACER Cardboard Countertop Display

complete with with 20 deep hole pencils, 20 replacement lead packs and 10 deep hole markers

Order no. 262 488 600



### TRACER Replacement leads in holster

Six Replacement leads for TRACER deep hole construction pencil (4 x 2B graphite / 2 x yellow).

Order no. 262 488 100



### TRACER Complete Marking Kit

Complete deep hole construction marking kit including replacement leads (4 x 2B graphite, 2 x yellow).

Order no. 262 488 400



### TRACER Proscribe Tools

Multifunction scribe tool with deep hole construction pencil and leads for profile scribing, parallel marking and more.

complete with 6 replacement leads, holster und carrying case

Order no. 262 488 700



### TRACER Contour Gauge Kit

Heavy-duty tool designed for easy profile scribing. With a lockable mechanism, the Contour Gauge locks into place for precise tracing.

Kit complete with Contour Gauge 130 mm, Contour Gauge 250 mm + Deep Hole Pencil

Order no. 262 488 800



Antarc Ltd  
62 Muthiti Road, Westlands, Nairobi, Kenya  
Mobile: +254733503500  
Email: [interiors@antarc-ke.com](mailto:interiors@antarc-ke.com)